

UNDERHOOD™ **40** AIR COMPRESSORS



Installation Manual for VMAC System

V400009

2015 – 2019 Ford Transit
3.5 L EcoBoost

www.vmacair.com

Table of Contents

Safety	3
Warranty	4
General Information	6
System Identification, Warranty Registration and Warning Labels.....	8
Preparing for Installation	10
Installing the Compressor.....	18
Installing the Waste Heat Air Separator Package (WHASP) Tank.....	24
Installing the Bulkhead Fittings	27
Hose Requirements	31
Connecting the Hoses	32
Adding Oil to the System	39
Installing the Control System	40
Installing the Air Filter and Power Steering Reservoir	59
Air Receiver Tank	62
Recommended Accessories	63
Completing the Installation	64
Testing the Installation	65
Performance Testing and System Adjustments	68
Accessory Products from VMAC	70
Warranty Registration	76

Revision	Revision Details	Revised by	Checked by				Implemented
			Eng.		Tech.	Qual.	
			Mech.	Elec.			
A	Initial Release	MSP	CAM	AJH	GB	AWG	7 Feb 2018
B	ECN 19-157 Cap model year	MSP	N/A	N/A	MSP	N/A	5 Nov 2019
C	ECN: 20-210 Receiver tank requirement	MSP	MRH	N/A	MSP	N/A	4 Nov. 2020

Additional Application Information

- Use of an air receiver tank (minimum 6 USG) is required with this application.
- 2015 – 2019 Ford Transit, 3.5 L EcoBoost.

Registered Trademarks

All trademarks mentioned in this manual are the property of their respective owners. VMAC's use of manufacturers' trademarks in this manual is for identification of the products only and does not imply any affiliation to, or endorsement of said companies.

Loctite®, **Loctite® 242** and **Loctite® 567** are registered trademarks of Henkel AG & Company KGaA.

Eaton Aeroquip® is a registered trademark of EATON AEROQUIP INC.

Torx® is a registered trademark of Acument Intellectual Properties, LLC

Ford® and **EcoBoost®** are registered trademarks of Ford Motor Company.

Important Information

The information in this manual is intended for certified VMAC installers who have been trained in installation and service procedures and/or for anyone with mechanical trade certification who has the tools and equipment to properly and safely perform the installation or service. Do not attempt installation or service without the appropriate mechanical training, knowledge and experience. Follow all safety precautions. Any fabrication for correct fit in modified vehicles must follow industry standard "best practices".

Notice

Copyright © 2020 VMAC Global Technology Inc. All Rights Reserved. These materials are provided by VMAC for informational purposes only, without representation or warranty of any kind, and VMAC shall not be liable for errors or omissions with respect to the materials. The only warranties for VMAC products and services are those set forth in the express warranty statements accompanying such products and services, if any, and nothing herein shall be construed as constituting an additional warranty. Printing or copying of any page in this document in whole or in part is only permitted for personal use. All other use, copying or reproduction in both print and electronic form of any part of this document without the written consent of VMAC is prohibited. The information contained herein may be changed without prior notice.

Printed in Canada

Safety

Important Safety Notice

The information contained in this manual is based on sound engineering principles, research, extensive field experience and technical information. Information is constantly changing with the addition of new models, assemblies, service techniques and running OEM changes. If a discrepancy is found in this manual, contact VMAC Technical Support prior to initiating or proceeding with installation, service or repair. Current information may clarify the issue. Anyone with knowledge of such discrepancies, who proceeds to perform service and repair, assumes all risks.

Only proven service procedures are recommended. Anyone who departs from the specific instructions provided in this manual must first ensure that their safety and that of others is not being compromised, and that there will be no adverse effects on the operational safety or performance of the equipment.

VMAC will not be held responsible for any liability, consequential damages, injuries, loss or damage to individuals or to equipment as a result of the failure of anyone to properly adhere to the procedures set out in this manual or standard safety practices.

Safety should be the first consideration when performing any service operations. If there are any questions concerning the procedures in this manual, or more information is required, please contact VMAC Technical Support prior to beginning work.

Safety Messages

This manual contains various warnings, cautions and notices that must be observed to reduce the risk of personal injury during installation, service or repair and the possibility that improper installation, service or repair may damage the equipment or render it unsafe.



This symbol is used to call attention to instructions concerning personal safety. Watch for this symbol; it points out important safety precautions, it means, "Attention, become alert! Your personal safety is involved". Read the message that follows and be aware of the possibility of personal injury or death. As it is impossible to warn of every conceivable hazard, common sense and industry standard safety practices must be observed.



This symbol is used to call attention to instructions on a specific procedure that if not followed may damage or reduce the useful life of the compressor or other equipment.



This symbol is used to call attention to additional instructions or special emphasis on a specific procedure.

Warranty

VMAC Standard Warranty (Limited)

For complete warranty information, including both VMAC Standard Warranty (Limited) and VMAC Lifetime Warranty (Limited) requirements, please refer to our current published warranty located at: www.vmacair.com/warranty



If you do not have access to a computer, please contact us and we will be happy to send you our warranty.

VMAC's warranty is subject to change without notice.

VMAC Lifetime Warranty (Limited)

A VMAC Lifetime Limited Warranty is offered on the base air compressor only and only on UNDERHOOD, Hydraulic Driven, Transmission Mounted, Gas and Diesel Engine Driven Air Compressors, Multifunction Power Systems, and other products as defined by VMAC, provided that (i) the purchaser fully completes and submits a warranty registration form within 3 months of purchase, or 200 hours of operation, whichever occurs first; (ii) services are completed in accordance with the Owner's Manual; (iii) proof of purchase of applicable service kits are made available to VMAC upon request.



The VMAC Lifetime Warranty is applicable to new products shipped on or after 1 October, 2015.

Warranty Registration

The VMAC warranty registration form is located near the back of this manual. This warranty registration form must be completed and sent to VMAC at the time of installation for any subsequent warranty claim to be considered valid.

There are 4 ways the warranty can be registered with VMAC:



www.vmacair.com/warranty



warranty@vmacair.com



(877) 740-3202



VMAC - Vehicle Mounted Air Compressors
1333 Kipp Road, Nanaimo, BC, Canada V9X 1R3

VMAC Warranty Claim Process



VMAC warranty work must be pre-authorized by VMAC. Claims are processed via our dealer network. If you are not a VMAC dealer, please select one to work with via our Dealer Locator: <https://www.vmacair.com/dealer-locator/>



1. Communicate with VMAC Technical Support at 1-888-241-2289 or tech@vmacair.com to help diagnose/troubleshoot the problem prior to repair. VMAC technical support will require the VMAC System ID, hours on the compressor and mileage on the vehicle.
2. VMAC will provide direction for repair or replacement of the failed components.
3. If requested, failed parts must be returned to VMAC for evaluation.
4. Dealers may login to the VMAC website to view the "VMAC Labour Time Guide" (under "Agreements") to see the allowable warranty labour times.
5. Warranty invoices must include the Service Ticket number, VMAC System ID#, hours on the compressor, and a detailed description of the work performed.
6. VMAC Warranty does not cover consequential damages, overtime charges, mileage, travel time, towing/recovery, cleaning or shop supplies.
7. Dealers submit warranty claims on behalf of the Vehicle Owner/End User affected by the defective part(s). The dealer ensures that all warranty credits are refunded back to the Vehicle Owner/End User who made the initial warranty claim.



In order to qualify for Lifetime Warranty (Limited), the completed warranty registration form must be received by VMAC within 3 months of the buyer receiving the Product(s), or 200 hours of operation, whichever occurs first.

If the completed warranty registration form has not been received by VMAC within 3 months of the buyer receiving the Product(s), or 200 hours of operation, the warranty period will be deemed to commence 30 days from the date of shipment from VMAC.

Failure to follow the warranty claim process may result in denial of the warranty claim.

VMAC Product Warranty Policies & Warranty Registration can be found on the VMAC website (see previous page for URL).

General Information

Optional Equipment Compatibility

While VMAC strives to design systems compatible with optional OEM equipment (such as running boards), it is impractical to develop systems that accommodate every OEM and aftermarket option or add-on. Whenever possible, VMAC endeavors to advise of compatibility issues in the "Additional Application Information" section of the manual. Even when specific optional equipment is determined by VMAC to be incompatible, it does not preclude the vehicle upfitter or end user from modifying the optional equipment to make it compatible with the installed VMAC system. VMAC does not warranty or accept responsibility or liability for the fitment, function or safety of any products modified in any way not expressly outlined in the installation manual.

Before Starting



Note and label all parts that are removed from the vehicle as many of the OEM parts will be reused during the installation of the VMAC system.

Read this manual prior to beginning the installation to ensure familiarity with the components and how they will fit on the vehicle. Identify any variations from the application list such as vehicle model, engines, or optional equipment (e.g., dual alternator, active steering assist, etc.).

Open the package, unpack the components and identify them using the Illustrated Parts List (IPL) included in the Fastener Pack.

Hose Information

Depending on other installed equipment, it might be necessary to move the air/oil separation tank from its intended location. The hoses used in VMAC compressor systems have a specific inner liner that is compatible with VMAC compressor oil. Use of hoses other than those supplied or recommended by VMAC may cause compressor damage and may void your warranty. Please contact VMAC for replacement hoses and further information.

Ordering Parts

To order parts, contact a VMAC dealer. The dealer will ask for the VMAC serial number, part number, description and quantity. Locate the nearest dealer online at www.vmacair.com/dealer-locator or call 1-877-912-6605.



Special Tools Required

- 15 mm serpentine belt wrench.

Torque Specifications

All fasteners must be torqued to specifications. Use manufacturers' torque values for OEM fasteners.

The torque values supplied in Table 1 are intended for VMAC supplied components, or for use as a guide in the absence of a torque value provided by an OEM.



Apply Loctite 242 (blue) to all fasteners (except nylon lock nuts) unless otherwise stated.

Torque values are with Loctite applied unless otherwise specified.

Standard Grade 8 National Coarse Thread								
Size (in)	1/4	5/16	3/8	7/16	1/2	9/16	5/8	3/4
Foot pounds (ft•lb)	9	18	35	55	80	110	170	280
Newton meter (N•m)	12	24	47	74	108	149	230	379

Standard Grade 8 National Fine Thread					
Size (in)	3/8	7/16	1/2	5/8	3/4
Foot pounds (ft•lb)	40	60	90	180	320
Newton meter (N•m)	54	81	122	244	434

Metric Class 10.9						
Size (mm)	M6	M8	M10	M12	M14	M16
Foot pounds (ft•lb)	4.5	19	41	69	104	174
Newton meter (N•m)	6	25	55	93	141	236

Table 1 — Torque Table

System Identification, Warranty Registration and Warning Labels



Preparation for installation is very important. Missing a step or an item can cause problems in the installation or damage to components.

Check off each item as it is completed so that no steps are missed.

- Review the contents of the system using the illustrated parts list to ensure all components are present and in the correct quantity. If any components are missing, have the system ID ready and call VMAC Technical Support at (888) 241-2289.



The VMAC warranty form must be completed and returned to VMAC at the time of installation for any subsequent warranty claim to be considered valid.

- Complete the warranty form. The VMAC warranty form is located at the back of this manual, as well as online at: www.vmacair.com/warranty



The System Identification Plate must be attached to the vehicle at the time of installation. This plate provides information that allows VMAC to assist with parts and repairs.

- Mark and drill 2 × 7/64 in holes in the top of the cross member in front of the hood support. Secure the plate with the supplied self-tapping screws (Figure 1).



Figure 1 — System Identification Plate

- Install the VMAC belt routing diagram in a suitable location under the hood.

- As part of the installation process, ensure that the safety and operational instruction decal is affixed in an obvious location so that it can be seen by vehicle operators. A good spot for this is usually on the inside of the door or on the panel underneath the steering wheel (Figure 2).

VMAC
VEHICLE MOUNTED AIR COMPRESSORS

This vehicle is equipped with a
VMAC Air Compressor System.

OPERATING INSTRUCTIONS

Daily Pre Start Check:

1. Check oil level in tank.
2. Check drive belt system.
3. Check for leaks.

Start Up Procedure:

1. Ensure air system is depressurized.
2. Ensure all air outlets are CLOSED.
3. Place vehicle in Neutral or Park and engage park brake.
4. Start engine and bring to operating temperature.
5. Turn ON compressor.

Shutdown Procedure:

1. Ensure discharge valve is CLOSED.
2. Allow engine to idle for 1 minute.
3. Turn OFF compressor.
4. Wait for system to depressurize before restarting.

For Technical Support/Parts contact your VMAC Dealer
To locate your nearest dealer call 1-800-738-8622 (250-740-3200)

4400644-A

⚠ WARNING
Always allow system to
depressurize before restarting

Figure 2 — Operating Instruction label

- To alert any technicians that may service the vehicle, affix the servicing caution/contact label in the engine compartment near the hood latch in a visible location (Figure 3).

⚠

VMAC
VEHICLE MOUNTED AIR COMPRESSORS

1-888-241-2289
(250) 740-3200

**This vehicle is equipped with a
VMAC Air Compressor System.
Call VMAC Technical Support for
removal/installation information.**

4401017A

Figure 3 — Advisory label

Preparing for Installation



Ensure the VMAC Warranty Registration has been filled out and the System Identification Plate and Operating Instruction Label are installed prior to proceeding (Please see page 8 for details).

- Move the driver seat completely to the rear and remove the 2 front Torx fasteners (Figure 4).

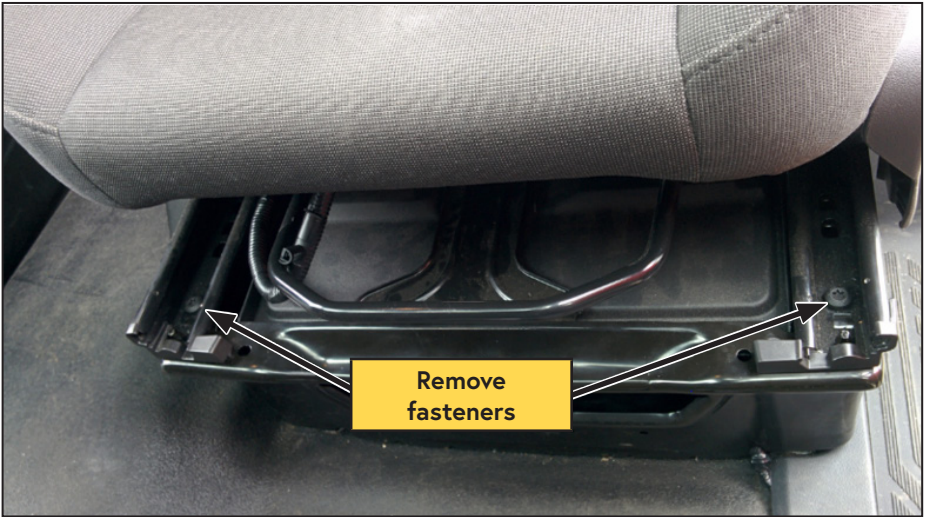


Figure 4 — Driver seat (front)

- Move the driver seat completely forward and remove the 2 rear Torx fasteners (Figure 5).

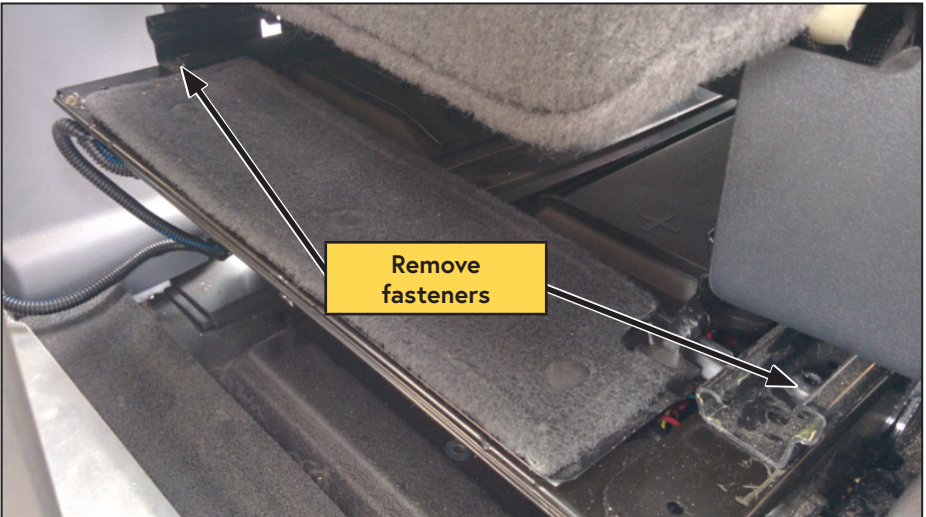


Figure 5 — Driver seat (rear)

- Remove the seat electrical connector (Figure 6).

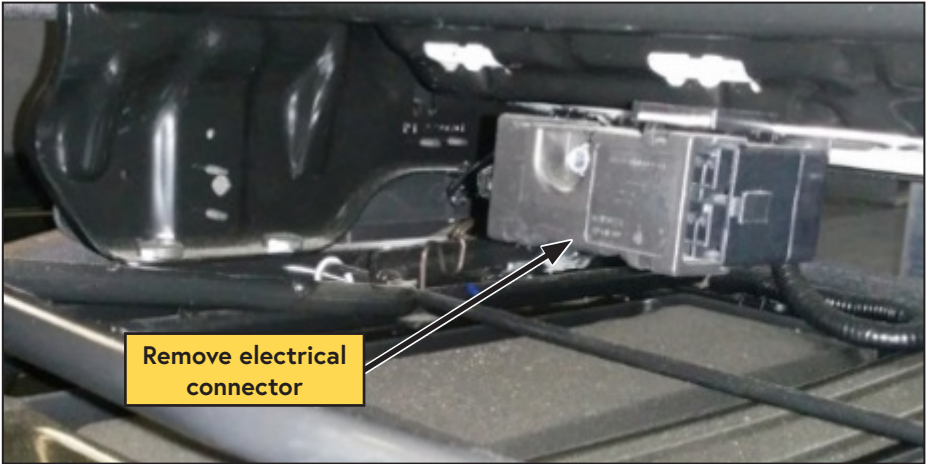


Figure 6 — Seat electrical connector

- The seat electrical harness is hooked to a stud on the bottom of the seat. Ensure the harness is unhooked and the wire can hang loose under the seat.
- Leave the seatbelt connected to the seat and lift the seat off of its mount and move the seat out of the way of the battery box.



The driver seat is heavy, use care when lifting it to prevent injury.

- Remove the 2 bolts underneath the piece of carpet at the rear of the battery cover retaining plate. Remove the metal bracket, then lift the plastic tabs on the rear of the battery cover to remove the battery cover (Figure 7).

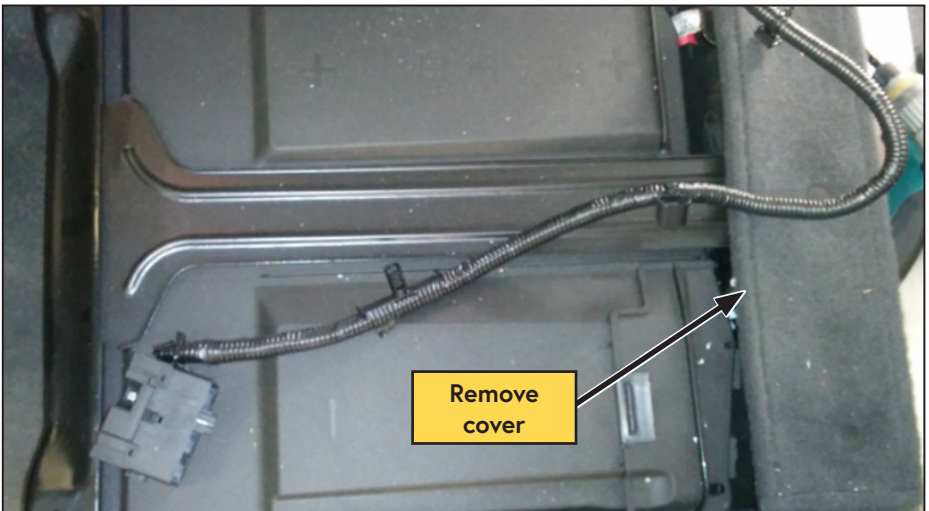


Figure 7 — Battery cover

- Disconnect the negative battery cable from the battery terminal stud (Figure 8).

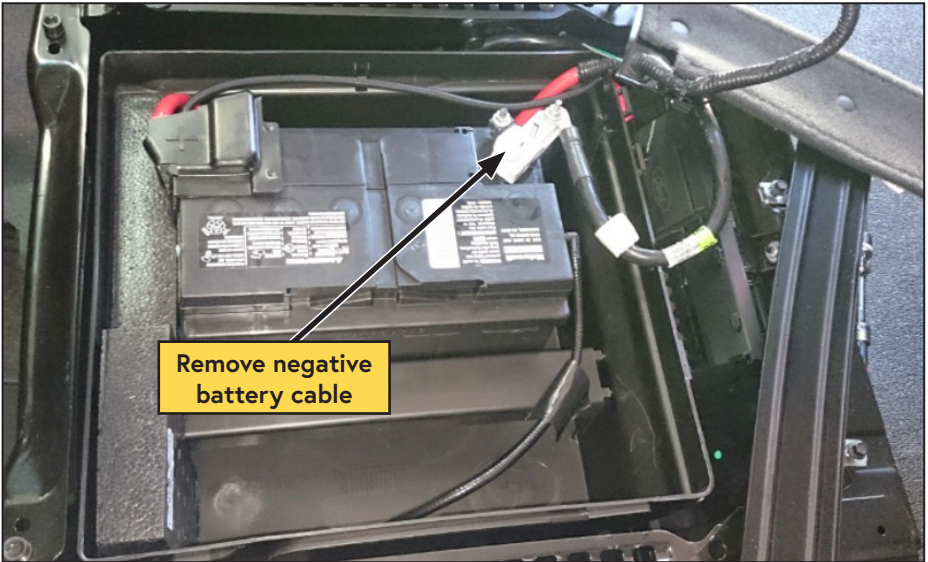


Figure 8 — Battery cables

- Disconnect the vacuum tube from the intake elbow (Figure 9).

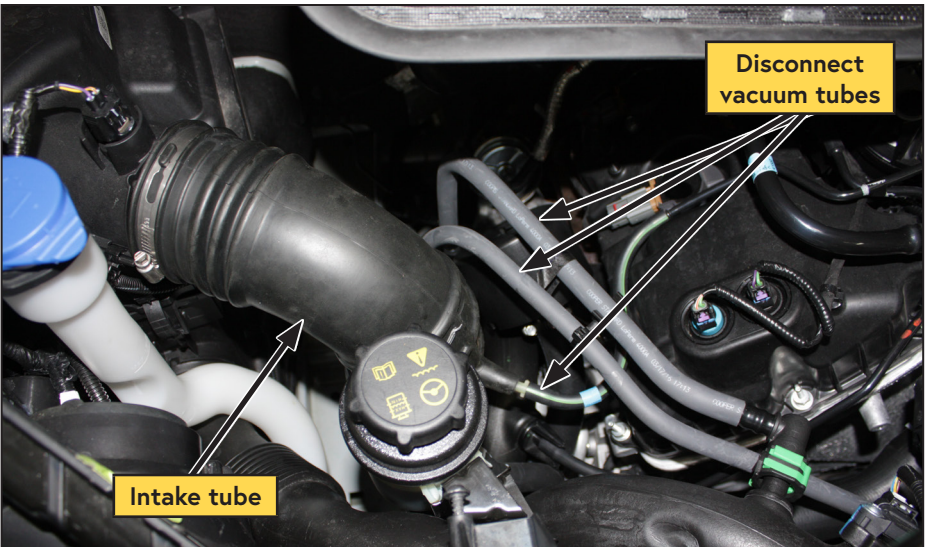


Figure 9 — Remove intake tube

- Disconnect the 2 vacuum tubes that run down the passenger side of the engine and secure them out of the way with cable ties (Figure 9).
- Loosen the 2 hose clamps on the intake tube (Figure 9).
- Remove the intake tube.

- Cover the engine intake, air filter, and vacuum tube openings to prevent contaminants from entering the engine's air intake system. (Figure 10).

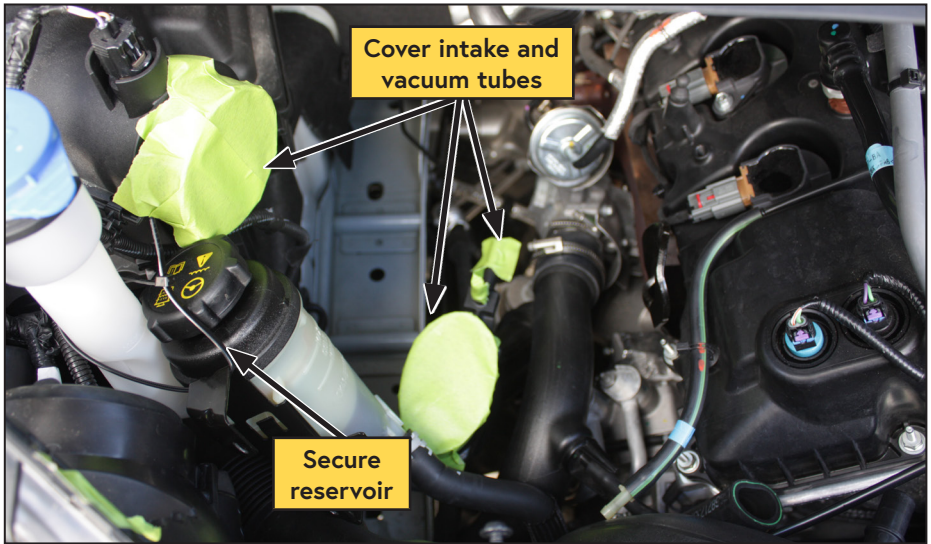


Figure 10 — Cover all intake tubes

- Remove the 2 Torx screws holding the power steering reservoir to the radiator support and secure the reservoir to the windshield washer fill tube using a cable tie (Figure 10).
- Remove the engine lifting eye and retain the fasteners (Figure 11).

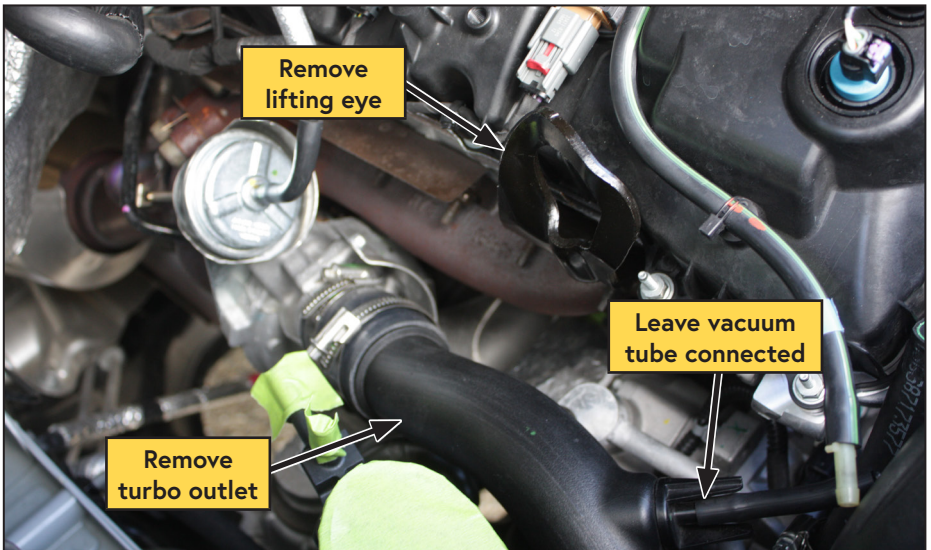


Figure 11 — Remove engine lifting eye and turbo outlet

- Remove the hose clamp on the passenger side turbocharger outlet tube (Figure 11).

- Remove the 2 bolts securing the lower intake tube to the front frame crossmember and the 2 bolts securing the lower intake tube to the upper intake tube (Figure 12).

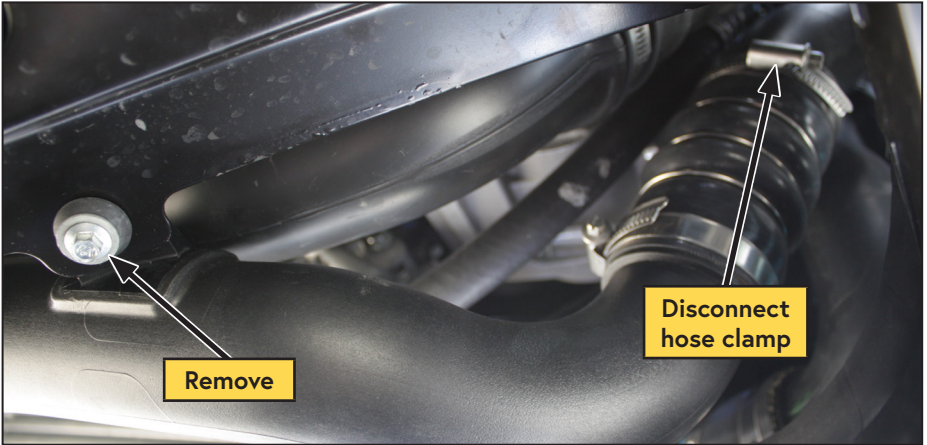


Figure 12 — Remove lower intake tube

- Disconnect the quick connect cuff on the bypass hose and unplug the electrical connector from the bypass module (Figure 13).



Figure 13 — Intake by-pass connections

- Remove the 3 hose clamps securing the lower intake tube and remove the tube from the engine bay (Figure 12).
- Remove the 2 hose clamps securing the upper intake tube. Disconnect the tube and remove it from the engine bay.
- Use cardboard to protect the Charge Air Cooler (CAC) from any accidental impacts.
- Remove the turbocharger outlet tube and place it out of the way on top of the engine. The small vacuum line attached to the turbocharger tube can be left connected (Figure 11).

- From underneath the vehicle, use a 15 mm serpentine belt wrench to release the tension and remove the OEM 6 rib belt from the crank pulley. Tuck the belt out the way (Figure 14).

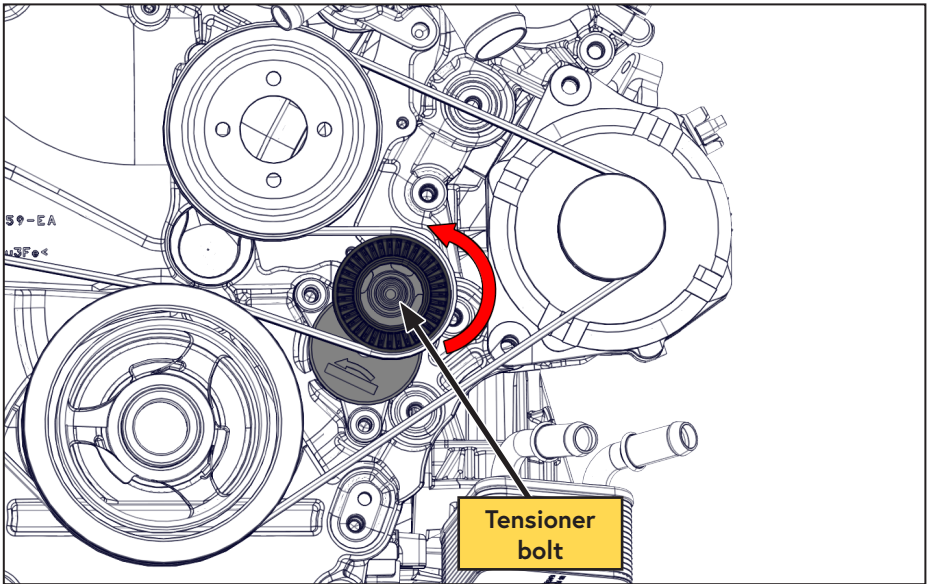


Figure 14 — Remove 6 rib belt from crank pulley

- Using a 14 mm wrench to release the tension, remove the OEM 4 rib belt and discard (Figure 15).

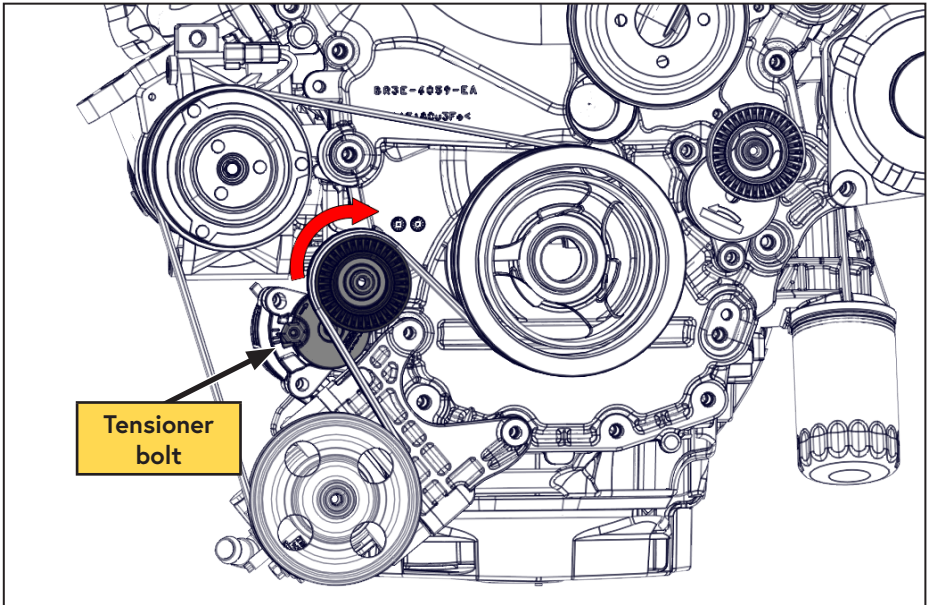


Figure 15 — Remove 4 rib belt



Do not disconnect the power steering hoses from the pump.

- Remove the 3 bolts securing the power steering pump to the OEM bracket. Retain all of the bolts for use later.
- Using pliers, remove and discard the 2 aluminum locating sleeves from the power steering pump (Figure 16).


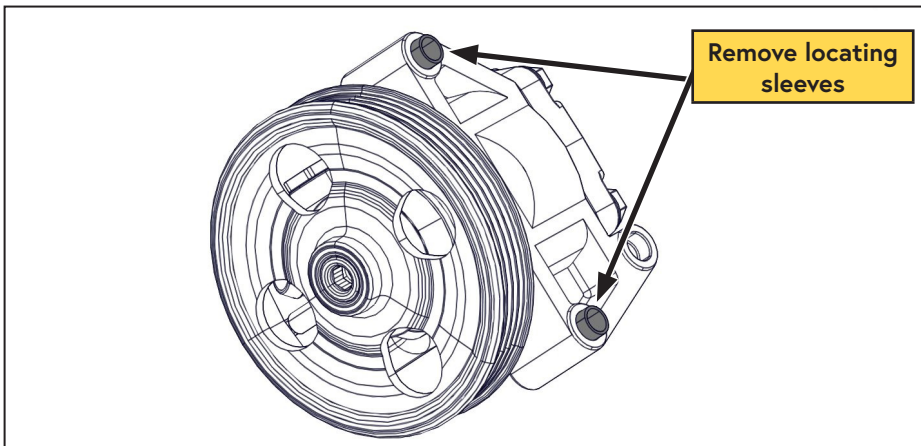


Figure 16 — Remove locating sleeves

- Secure the power steering pump out of the way with cable ties.
- Remove the bolt and Christmas tree fastener from the driver side cable tray and set them aside for later (Figure 17).



Driver side

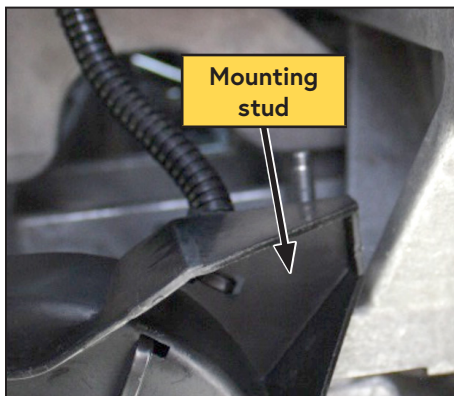

Passenger side

Figure 17 — Disconnect cable tray

- Remove the nut securing the passenger side of the cable tray. Pull the tab off the mounting stud and push the wiring harness out of the way (Figure 17).
- Remove the OEM power steering pump bracket from the engine. Retain all of the fasteners for use later.

- Apply Loctite 242 (blue) to the 2 supplied M8 × 1.25 × 30 mm fasteners and install them in the location shown. Torque the fasteners to specification (Figure 18).

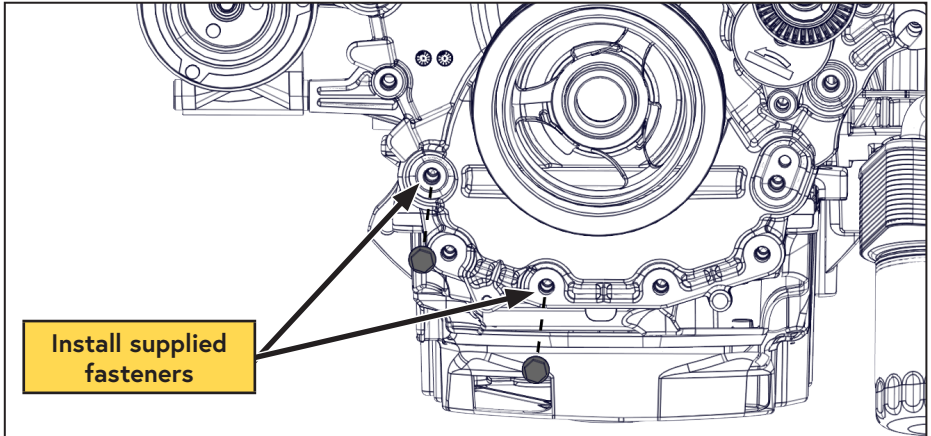


Figure 18 — Replace bracket fasteners

- Remove the cam cover bolt and discard it (Figure 19).

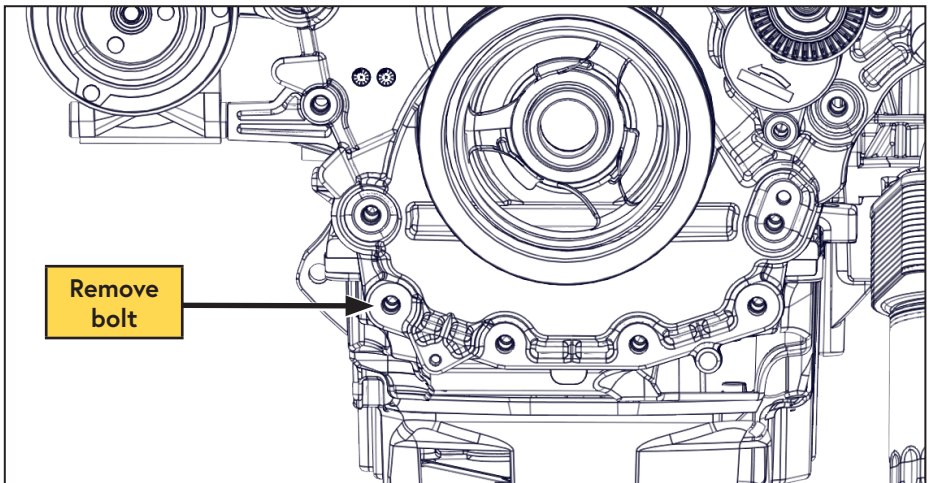


Figure 19 — Remove cam cover bolt

- Remove the OEM tensioner from the power steering bracket and set it aside for use later. The OEM power steering bracket and fasteners can be retained in case the vehicle will be returned to stock.



Use caution when deflecting or bending the A/C lines as excessive or repeated bending of these lines can cause them to weaken or rupture. Exposure to refrigerant can cause serious injury or death.

- From underneath the vehicle, gently deflect the metal A/C lines toward the passenger side of the engine bay and away from the engine. Final adjustments will be performed later in the install.

Installing the Compressor



Apply Loctite 242 (blue) to all engine mounted fasteners.



The OEM 4 rib tensioner must be installed on the VMAC bracket before installing the idler.

- Install the OEM 4 rib belt tensioner on the VMAC main bracket using the original OEM bolts (Figure 20).

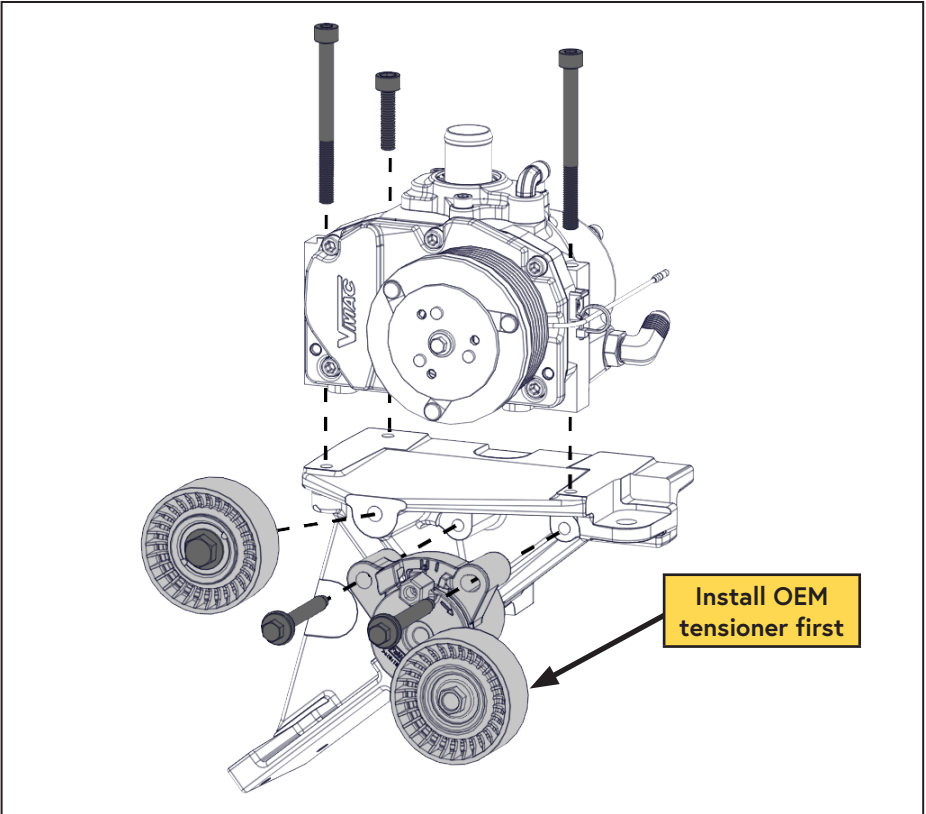


Figure 20 — Install main bracket components

- Install the supplied idler onto the main bracket (Figure 20)
- Mount the compressor assembly onto the main bracket using the supplied fasteners (Figure 20).

- Apply protective loom to the 3/8 in × 120 in hose.
- Connect the straight end of the 3/8 in × 120 in hose to the JIC fitting on the side of the compressor and tighten the fitting.
- Loosen the 3 × M8 A/C compressor bolts until the threads are still engaged but only enough to support the A/C compressor (Figure 21).

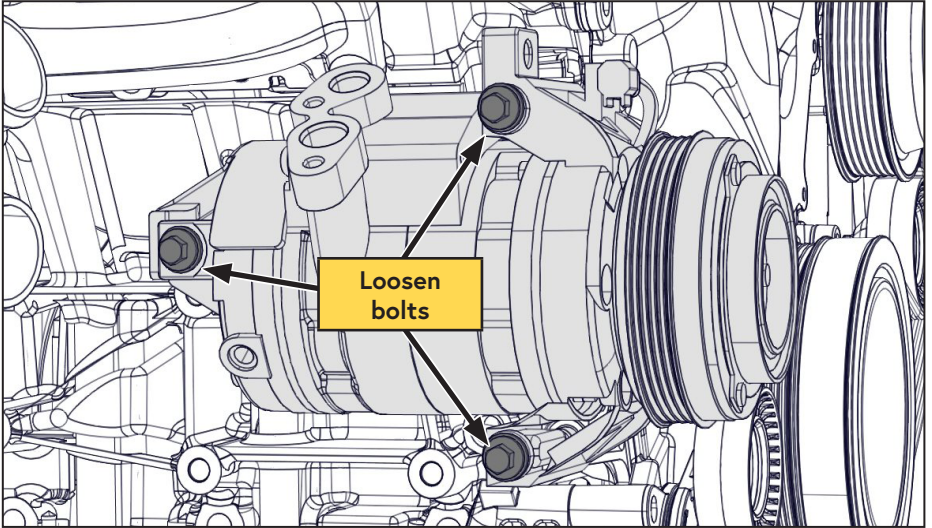


Figure 21 — A/C compressor bolts

- Remove the top A/C compressor bolts one at a time and install the supplied spacers between the A/C compressor and the engine. Reinsert the A/C compressor bolts until the threads are just engaged and the A/C compressor is still supported (Figure 22).

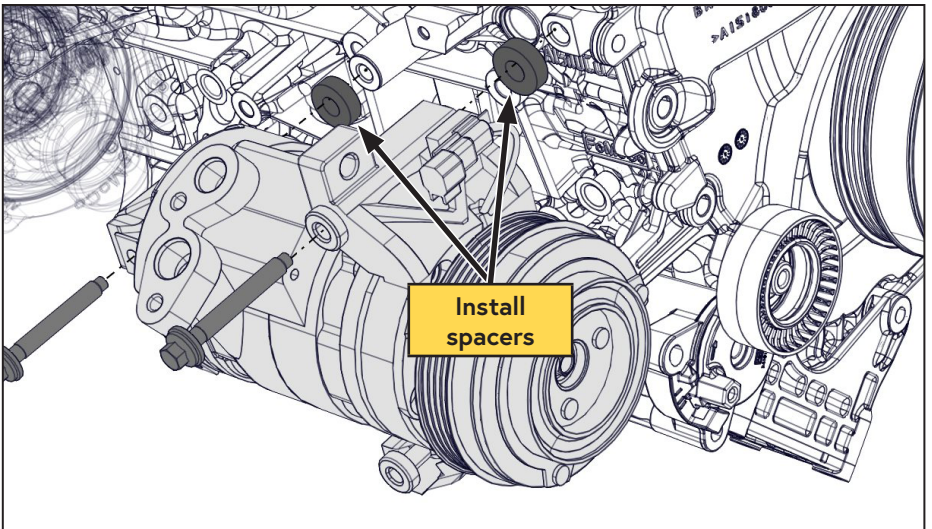


Figure 22 — A/C compressor spacers



The following steps will be easier to complete with an assistant.

- From underneath the vehicle, pass the compressor and main bracket assembly up past the A/C hoses. Deflect the flexible A/C hoses toward the front of the vehicle as necessary. Orient the compressor so that the inlet spigot points toward the passenger side of the vehicle.
- Withdraw the bottom A/C compressor bolt and while holding the A/C compressor away from its engine mounting points, insert the VMAC main bracket between the A/C compressor and the engine (Figure 23).

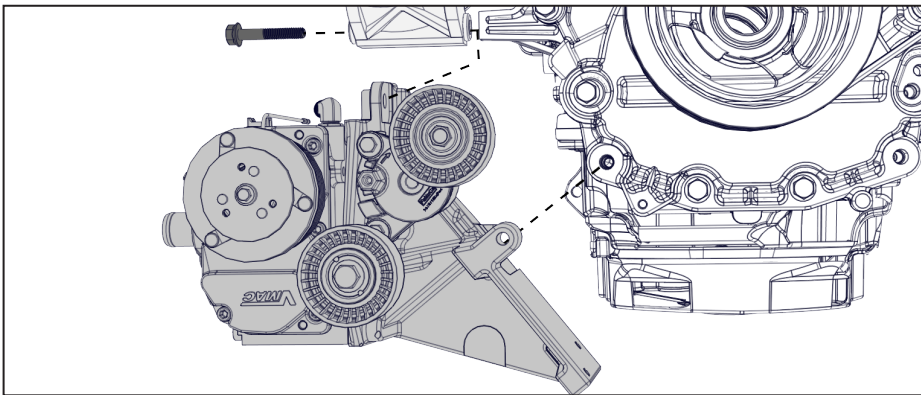


Figure 23 — Installing the main bracket

- Reinsert the bottom A/C compressor bolt and torque it to specification.
- Install one of the short OEM power steering pump fasteners, retained earlier, in the front bottom bolt location on the VMAC bracket (Figure 24).

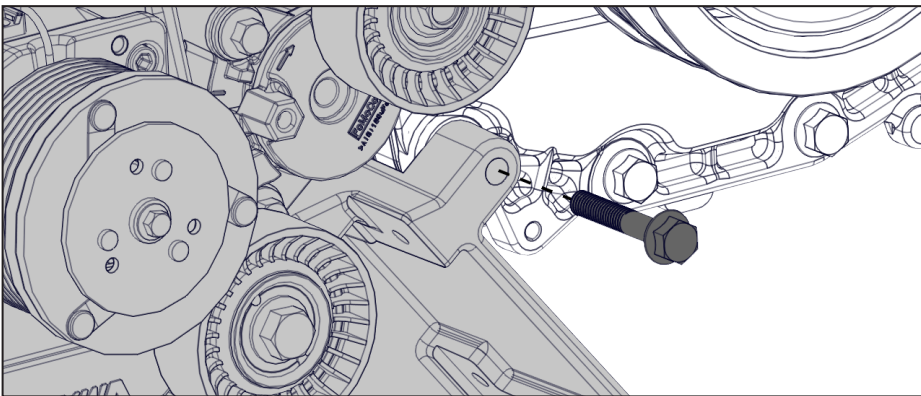


Figure 24 — Installing the main bracket

- Install the stud removed from the power steering bracket in the lower rear bottom bolt location.
- Torque the A/C compressor and VMAC main bracket bolts to specification.

- Pass the power steering pump in front of both of the flexible A/C lines and install it onto the VMAC bracket (Figure 25).

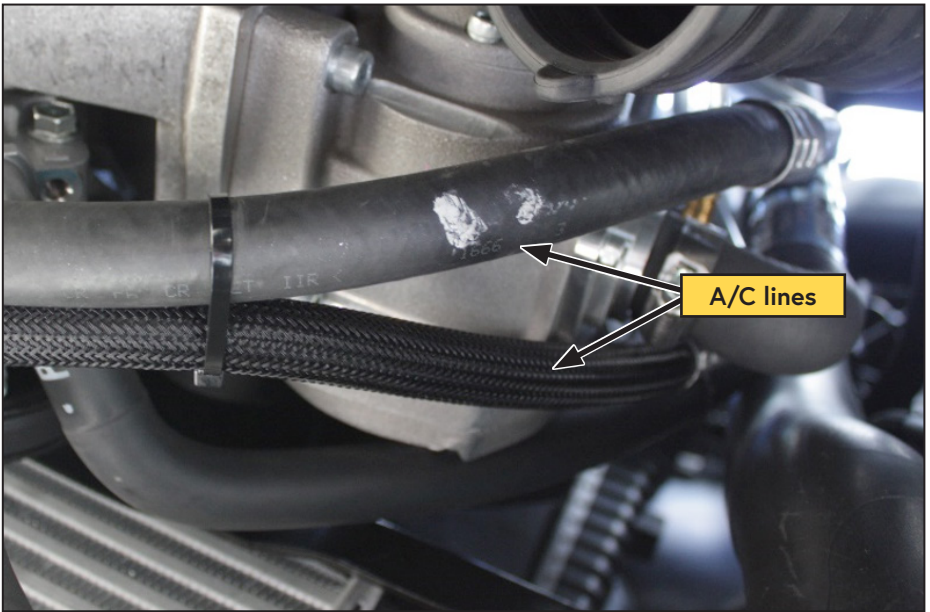


Figure 25 — Install the power steering pump



Ensure the OEM fasteners are used in the locations indicated below.

- Mount the power steering pump on the VMAC main bracket using the supplied M8 × 1.25 × 50 mm fastener and the 2 OEM fasteners retained earlier (Figure 26).

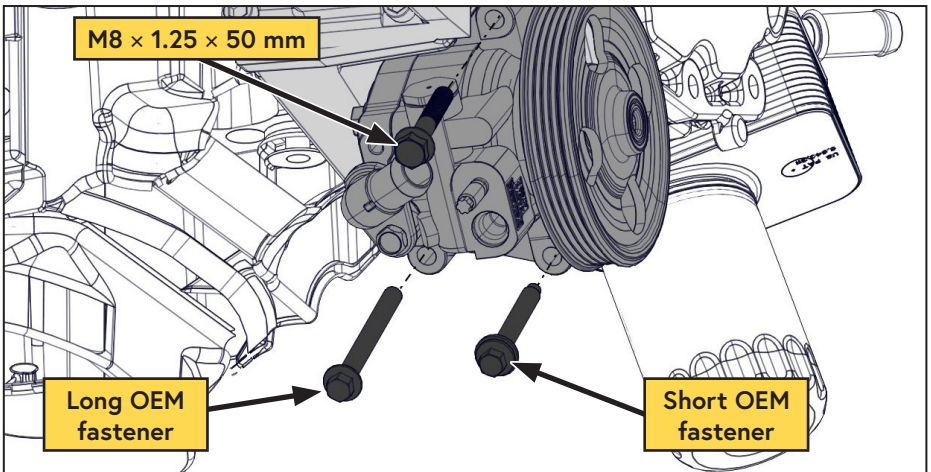


Figure 26 — Secure the power steering pump

- If necessary, reposition the A/C lines for better clearance around the compressor body and power steering pump. The hoses should run in a smooth curve around all of the components (Figure 27).



Figure 27 — Adjust A/C hoses

- Apply protective loom (not supplied) to the A/C lines where they pass near the power steering pump.
- Install the OEM cable tray.



The following steps will be easier to complete with an assistant.

- Install the supplied 4 rib VMAC Compressor belt so that it is centered on the compressor clutch, and tension the belt (Figure 28).

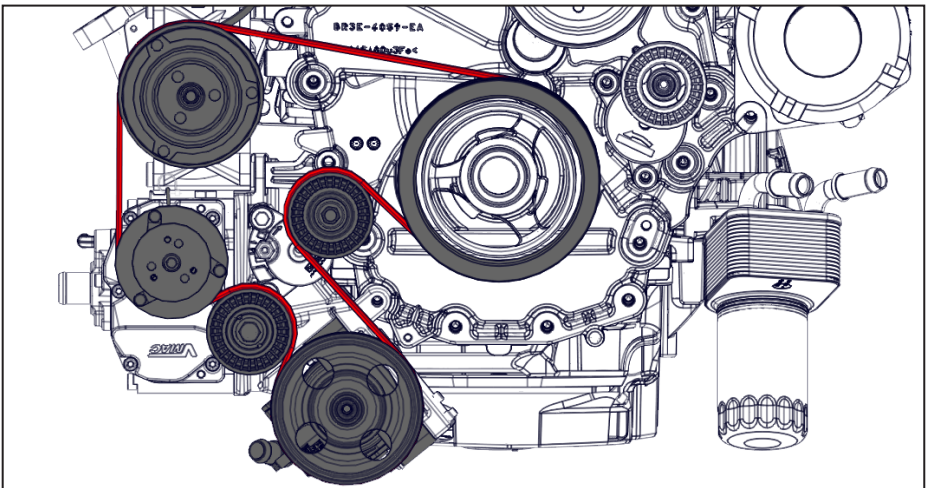


Figure 28 — VMAC belt routing

- Ensure the 4 rib belt is centered on the 8 rib compressor clutch. Two clutch ribs should be visible on each side of the belt (Figure 29).

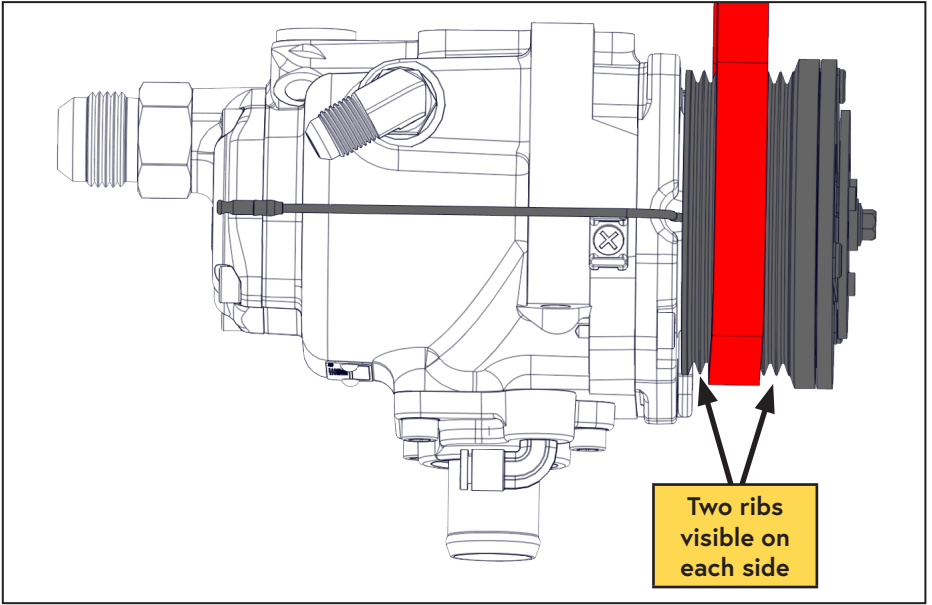


Figure 29 — Align belt on clutch

- Reinstall the OEM 6 rib belt and tension it (Figure 30).

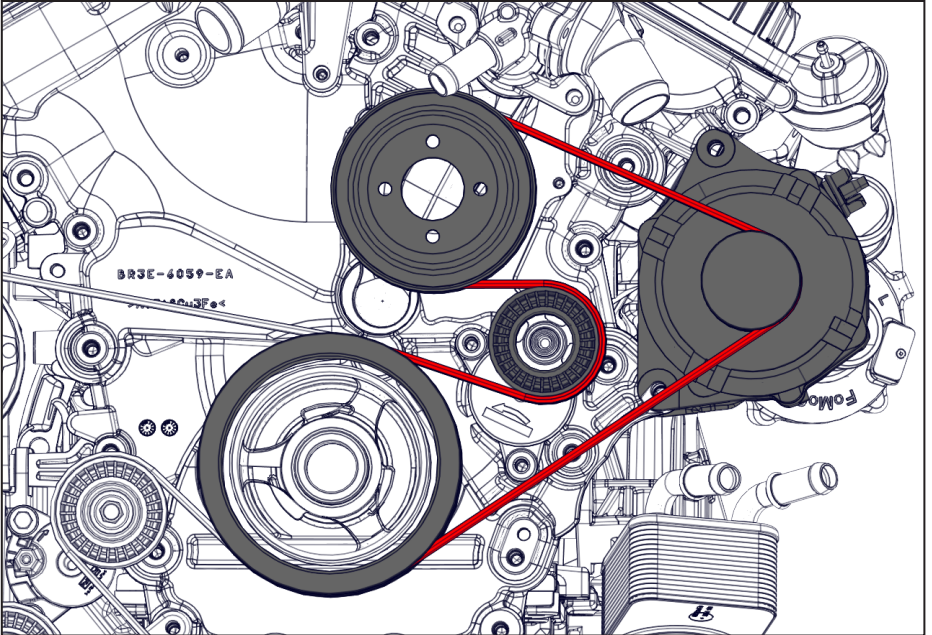


Figure 30 — 6 rib belt routing

Installing the Waste Heat Air Separator Package (WHASP) Tank

WHASP Tank location guidelines



When determining a mounting location for the WHASP Tank, ensure the following conditions are met:

- Adequate supply of fresh air and venting for the cooling fan.
- Minimum of 12 in of clearance at the front of the cooling fan.
- Minimum of 6 in clearance at the rear of the unit.
- Hose connections and wiring are accessible.
- Mounted on a level surface.
- Impact protection.
- The oil level sight glass is easily accessible.
- The oil fill and drain ports are accessible for servicing.
- Minimize the hose lengths to maximize performance.

Mounting the WHASP Tank

Refer to (Figure 31) for mounting dimensions.

Special consideration must be made to ensure the WHASP Tank will be protected from damage and to ensure that it has adequate ventilation.

In some cases, it may be necessary to fabricate a mounting bracket to position the tank in an appropriate location.

Secure the WHASP Tank by bolting the mounting feet to the installation surface, use M8 or 5/16 in fasteners (not supplied).

Mounting in an Enclosure or Body

Mounting the WHASP Tank in an enclosure will limit access to cooling air or restrict the escape of hot air from around the unit and will have an adverse effect on cooling.

Ensure adequate ventilation is provided for the cooling system to function properly.

It is not possible to make absolute recommendations regarding ventilation because of the widely differing configurations that are possible. Duty cycle, ambient temperature and enclosure shape are some of the important variables that need to be taken into account when determining the suitability of enclosure mounting.

Cool air ducted to the cooler and installing an exhaust fan to remove hot air is recommended.



Confirm the hose lengths included in this kit when determining the location of the WHASP Tank and bulkhead fittings. Hose lengths can be found in the Illustrated Parts List (IPL). If the WHASP Tank or bulkhead fitting location requires longer hoses, contact a local VMAC dealer. See page 6 for ordering information .

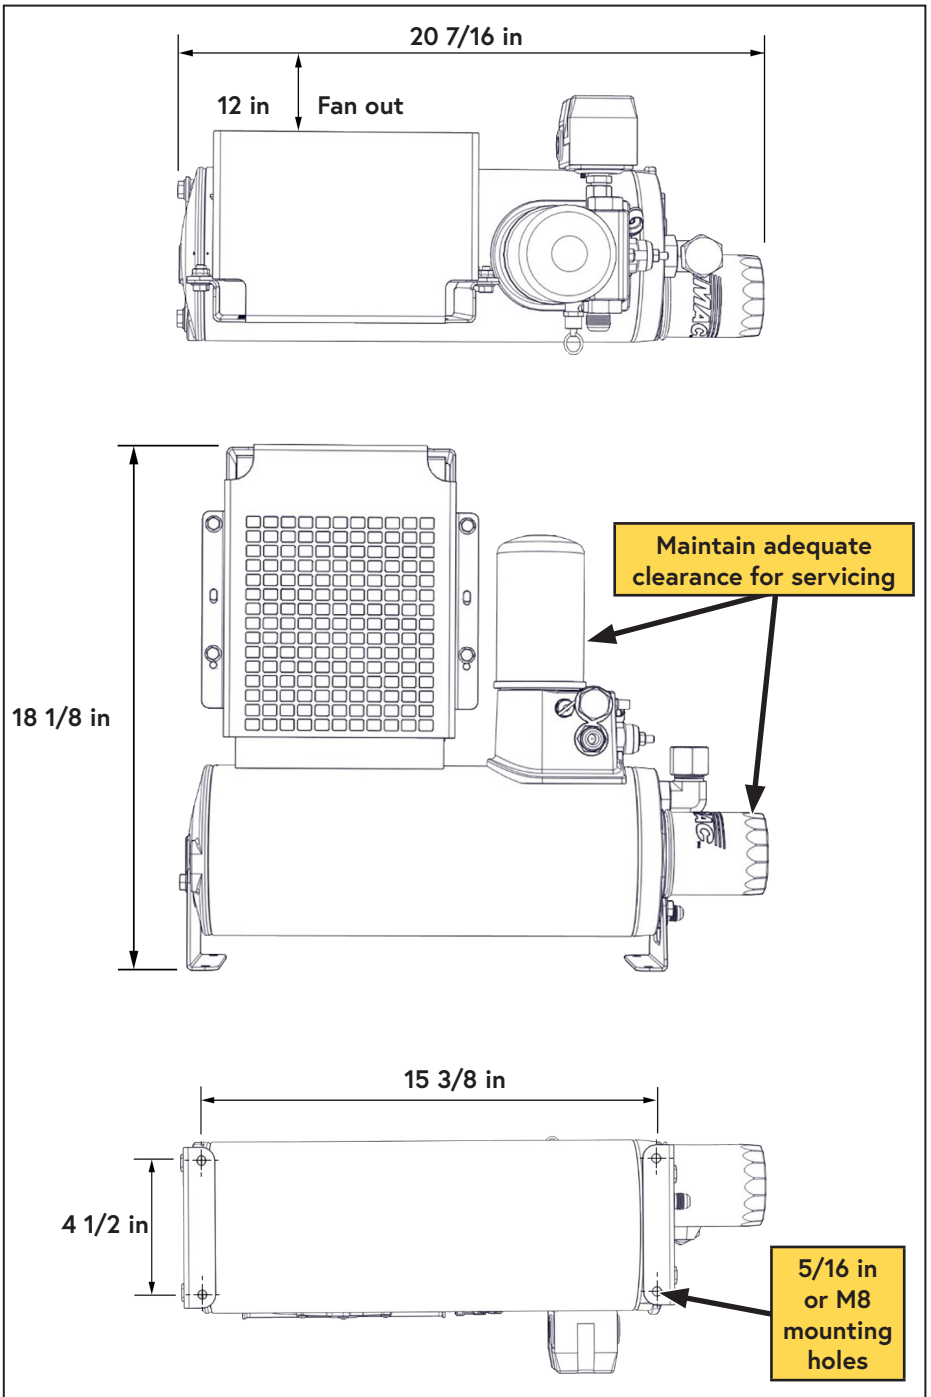



Figure 31 — Minimum WHASP Tank mounting clearances

Mounting the WHASP Tank

The WHASP Tank uses a "puller" fan to cool the air/oil mixture. Position the WHASP Tank to ensure there is adequate air flow and so that the fan is blowing out toward the cargo door. During operation, the door should be kept open to ensure there is a constant supply of cool air to prevent the system from overheating (Figure 32).

 Provide ample space to check the oil level, as well as access to the filters and compressor oil drain to facilitate servicing.

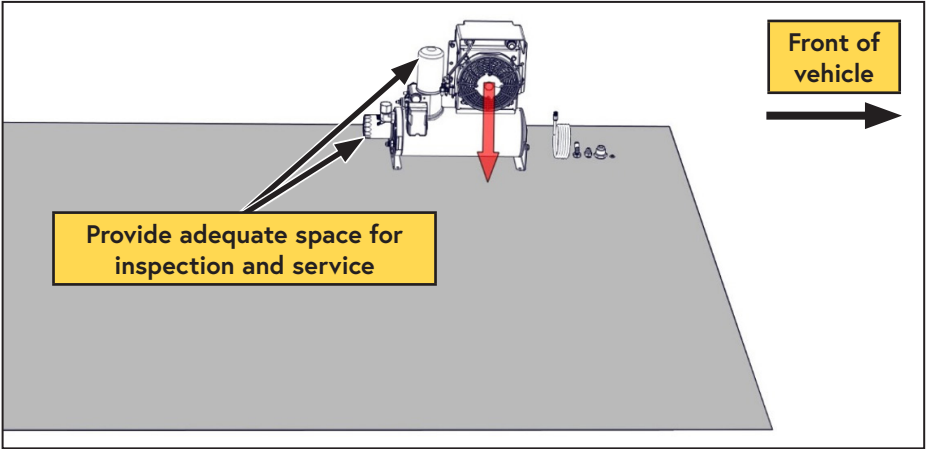



Figure 32 — WHASP ventilation

 A minimum of 6 in of clearance is recommended around the radiator (intake) side of the WHASP Tank to allow fresh, cool air to circulate into the cooler and fan (Figure 33).

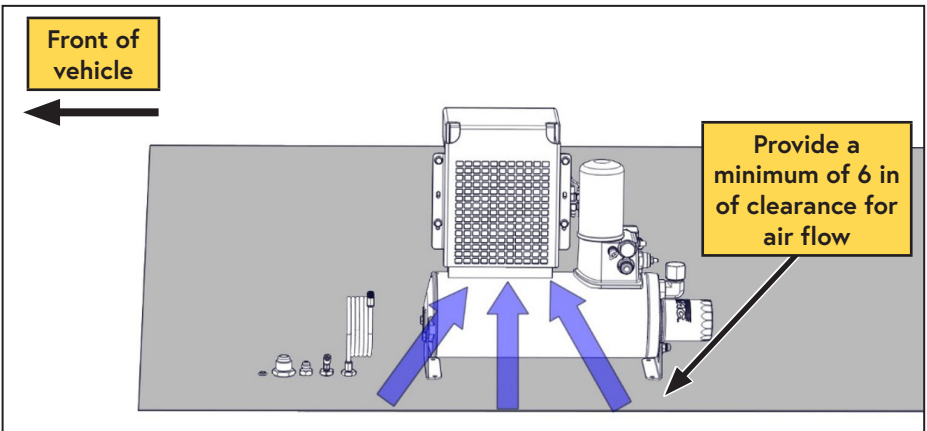


Figure 33 — WHASP ventilation

Installing the Bulkhead Fittings

4 bulkhead fittings are supplied with the system (Figure 34):

- 3 bulkhead fittings are used to pass the system discharge, oil, and scavenge hoses/tubes into the body of the vehicle.
- 1 bulkhead fitting is used to locate the blowdown muffler outside of the vehicle.

This kit includes hoses of a fixed length to run from the compressor to the bulkhead fittings, and from the fittings to the WHASP Tank.

To maximize compressor performance, hose lengths should be kept as short as possible; if longer hoses are required please follow the hose requirements listed on page 31 of this manual.

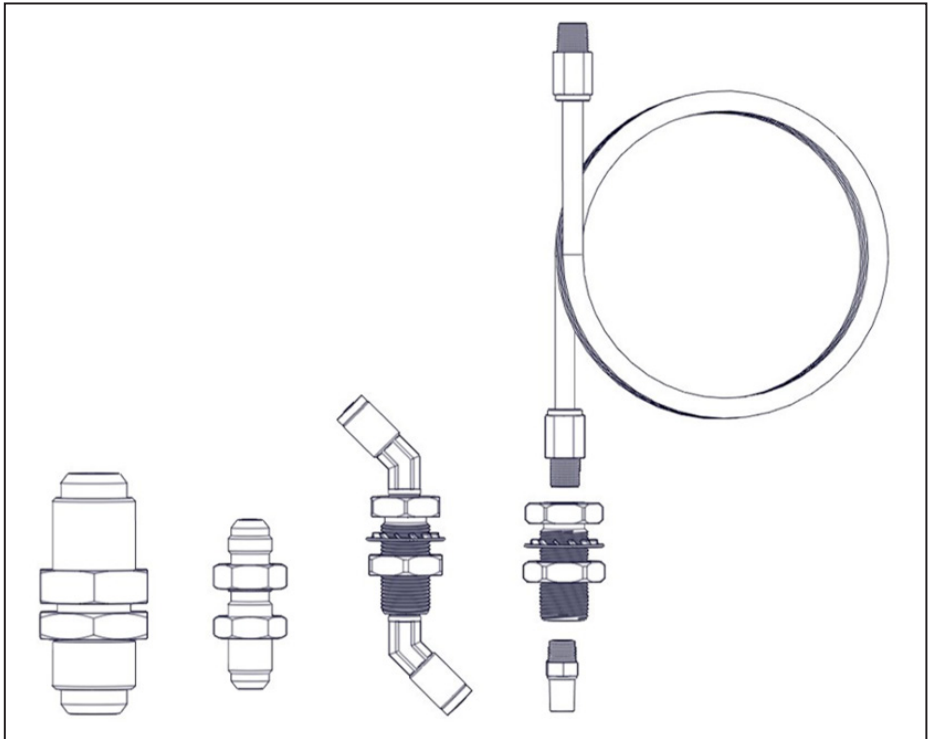


Figure 34 — Bulkhead fittings

- Locate the area shown, it is to the rear of fuel filler neck on the driver side floor.
The holes are shown for clarity and will be drilled in the following steps (Figure 35).

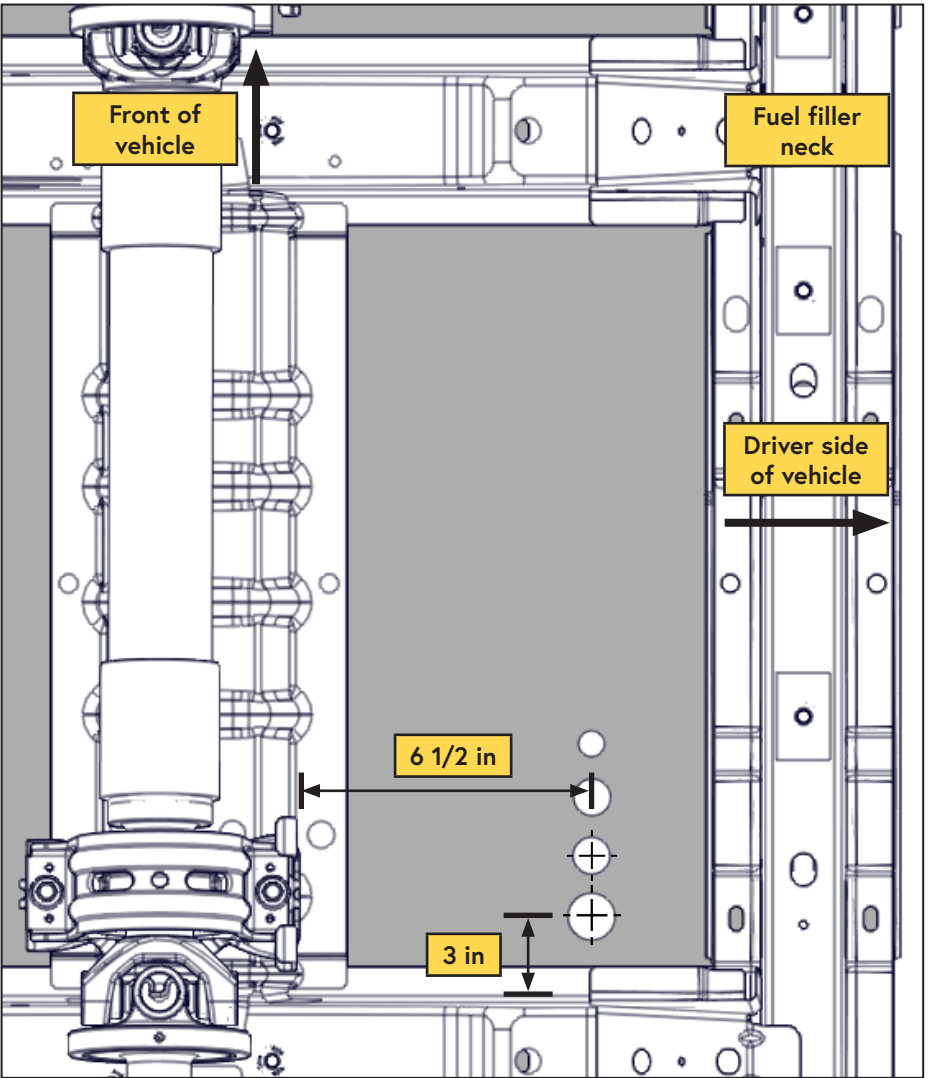


Figure 35 — Vehicle Chassis bottom view

- Drill the bulkhead fitting holes using a drill, step drill or hole saw. Leave enough room between the fittings to allow access for a wrench (Figure 36, Figure 37, Figure 38).
- Discharge from the compressor: $\varnothing 1\ 1/8$ in.
 - Oil return: $\varnothing 9/16$ in.
 - Oil scavenge: $\varnothing 5/8$ in.
 - Remote blowdown: $\varnothing 5/8$ in.

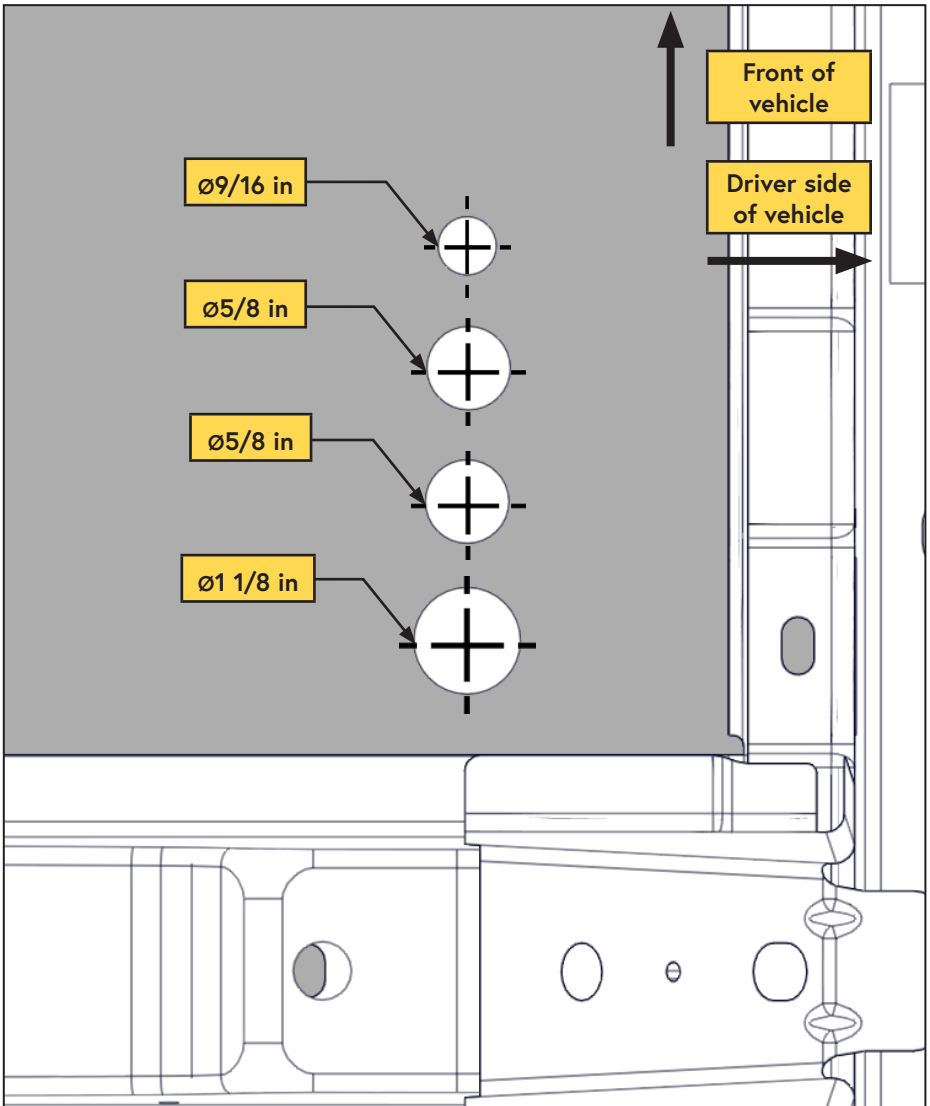


Figure 36 — Vehicle Chassis bottom view

- Fit the bulkhead fittings through the top of the hole and secure from the bottom with the supplied nuts. Apply Loctite 567 (thread sealant) when installing the 1/4 in push-to-connect fittings in the bulkhead fittings (Figure 37, Figure 38).

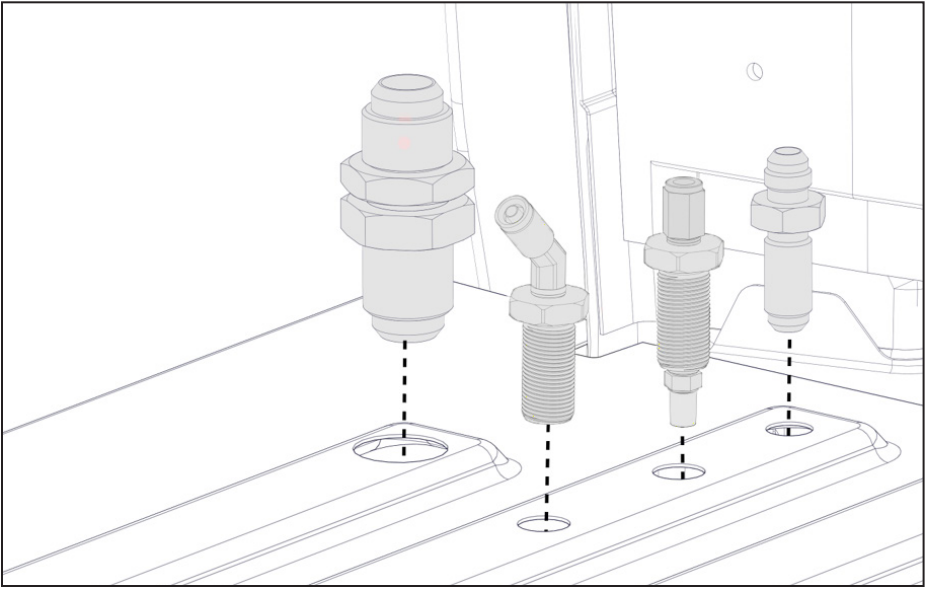


Figure 37 — Interior view

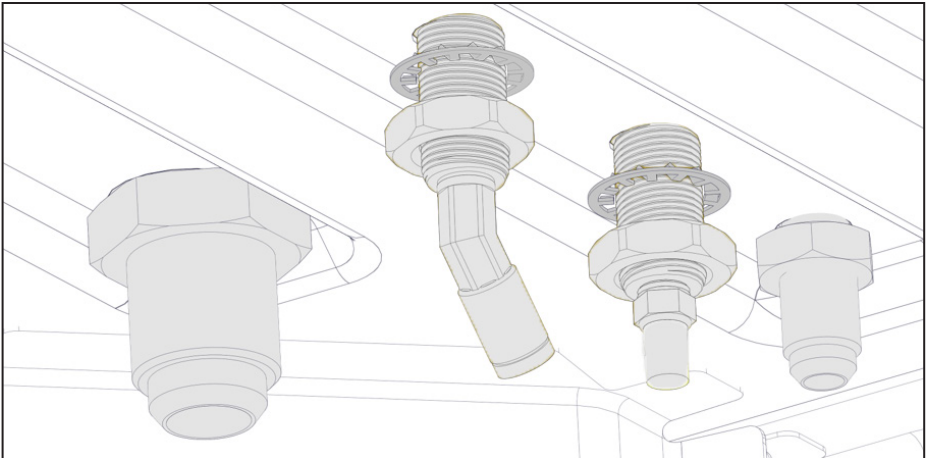


Figure 38 — Exterior View

Hose Requirements



*Only attempt to shorten the supplied hose if there is access to the appropriate equipment. **Do not** attempt to cut the hose and splice it using hose clamps.*



VMAC Compressor oil will degrade rubber lined hoses, use only hoses with an AQP elastomer type liner. Contact VMAC Technical Support at 1-888-241-2289 for further information.

The 1/4 in PTFE tube, and the 3/8 in and 3/4 in hoses with AQP elastomer liner, are specifically designed to work with VMAC compressor oil and at compressor operating temperatures.

Based on the desired location of the WHASP Tank, the hose lengths provided with this system may not be ideal. They can be shortened or replaced as necessary, or hose extenders can be used.

VMAC recommends shortening these hoses as a preferred alternative to coiling up and securing the excess. ***Shorter hose length will maximize system performance.***



Avoid using 90° fittings wherever possible as they cause flow restrictions and negatively impact performance.

The following hoses are included with this compressor kit:

From the compressor to the bulkhead fittings:

- 3/4 in × 120 in.
- 3/8 in × 120 in.
- 1/4 in (PTFE Tube) × 125 in.

From the WHASP Tank to the bulkhead fittings:

- 3/4 in × 28 in.
- 3/8 in × 28 in.
- 1/4 in (PTFE Tube) × 30 in.

If longer hoses are required:

To order parts, contact a VMAC dealer. The dealer will ask for the VMAC serial number, part number, description and quantity. See page 6 for ordering information.

- Eaton Aeroquip hoses with an "AQP" type inner liner are required.
- OTC fittings are required for the VMAC supplied hose.
- Push-lock fittings are suitable if FC332 hose is used.
- If Push-lock fittings are being used, do not use hose clamps as they will damage the hose and cause leaks.

Connecting the Hoses



When routing hoses, ensure cap plugs are installed so that contaminants do not get in the line. Take care when routing hoses, as a hose failure may damage the compressor and/or cause injury.



All hoses, tubes and wires that are installed, rerouted or shifted during the installation must be secured so that they do not contact any hot, sharp or moving parts. Use rubber coated P-clips wherever possible. Follow the routing suggestions in this manual and cover all hoses with plastic loom.



Ensure there is sufficient slack in the hose routing to allow for normal engine movement.

PTFE Tubing, Loom, and Push-To-Connect Fittings

- PTFE tubing should only be cut using proper tubing cutters. Side cutters, utility knives, etc. will deform the tube, preventing a proper seal (or leave sharp edges which cut the internal O-ring).
- When applying loom to the PTFE tube, leave approximately 1 in between the loom and the fitting.
- Ensure the tube is clean, cut at 90° and that there are not sharp edges.
- Lubricate the tube and firmly push it into the fitting so that the tube fully seats in the fitting.
- Slide the collet out, away from the body of the fitting to lock the tubing in place.
- Ensure the tube does not have any "play" to prevent the O-ring from wearing.

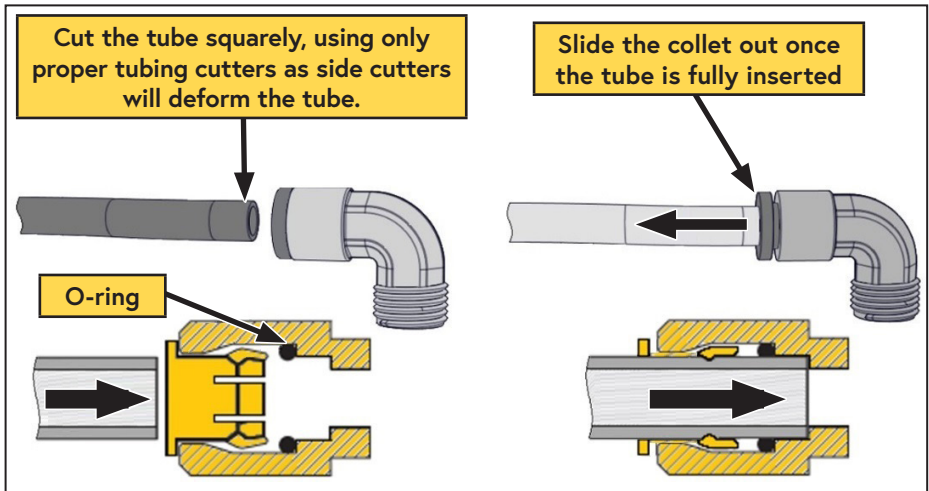


Figure 39 — Push-to-connect fittings

Connecting the Interior Hoses (Figure 40)

- Connect the straight ends of the 3/4 in x 28 in and 3/8 in x 28 in hoses to the top side of the bulkhead fittings.
- Connect the 1/4 in x 30 in PTFE tube to the top side of the bulkhead fitting.
- Bundle the PTFE tube and hoses together and route them to the WHASP Tank.
- Connect the 90° fitting on the 3/4 in x 28 in hose to the #12 JIC fitting (air/oil inlet) on the cooler above the fan (Figure 34).
- Connect the 90° fitting on the 3/8 in x 28 in hose to the #6 JIC fitting (oil return fitting) beneath the oil filter on the tank (Figure 34).
- Connect the 1/4 in PTFE tube to the 1/4 in push-to-connect (oil scavenge) fitting near the coalescing filter (Figure 31).
- Connect the discharge fitting (#8 male JIC) to the customer's air system (hose not supplied).
- Secure all hoses, tubes, and wires with P-clips and/or cable ties.

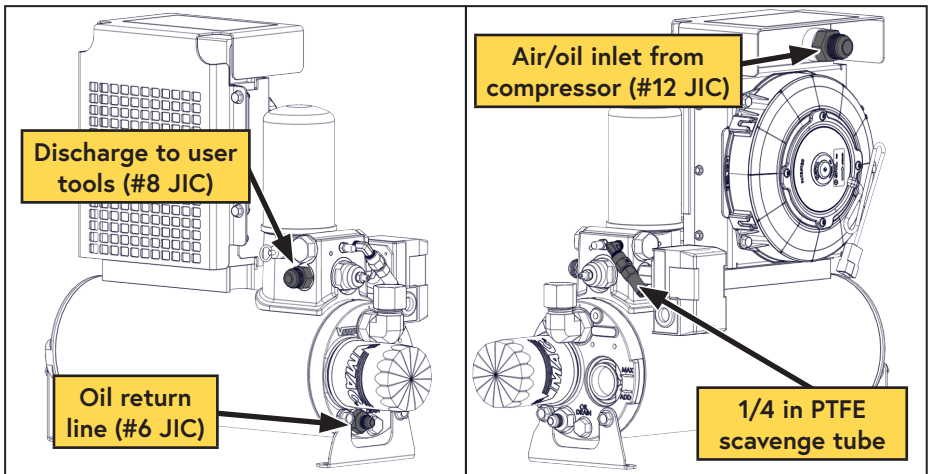


Figure 40 — WHASP Tank connections



Use of an air receiver tank (minimum 6 USG) is required with this application.

Follow the instructions on page 62 of this manual to prevent damage to the system.

Remote Muffler Installation

The WHASP Tank automatically depressurizes when the clutch disengages. This prevents damage to the compressor on the next start up.

Installing the blowdown muffler outside of the vehicle will reduce cabin noise during blowdown, and will ensure any oil vapor will be safely discharged outside of the vehicle.

- Remove the blowdown muffler from the side of the WHASP Tank (below the coalescing filter) (Figure 41).

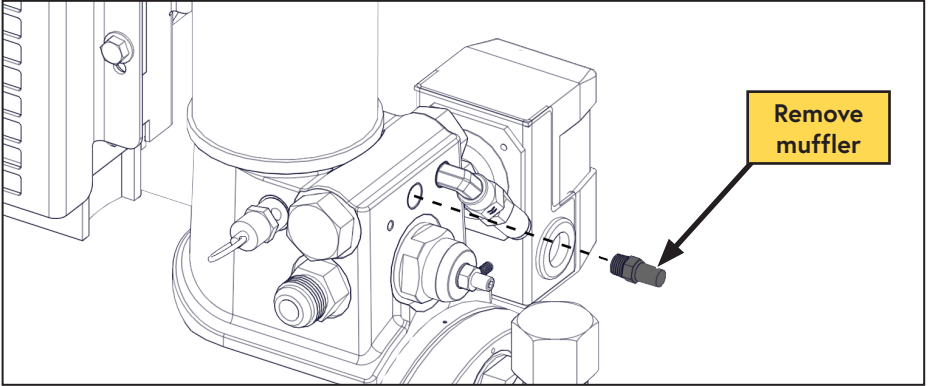


Figure 41 — Remove blowdown muffler



Ensure no debris enters the WHASP Tank manifold. Contamination of the assembly may cause erratic performance.

- Separate the PTFE tube from the fittings.
- Apply the supplied 1/4 in split loom to the 1/4 in PTFE tube.
- Apply Loctite 567 (thread sealing) compound to the 1/4 in push-to-connect fitting and install it into the threaded hole which previously held the blowdown muffler (Figure 42).

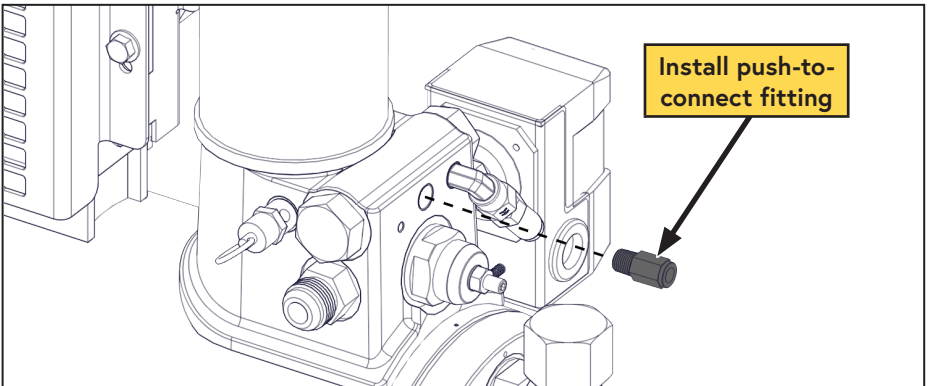


Figure 42 — Install push-to-connect fitting

- Connect the 1/4 in PTFE tube into the push-to-connect fitting installed in the WHASP Tank (Figure 43).

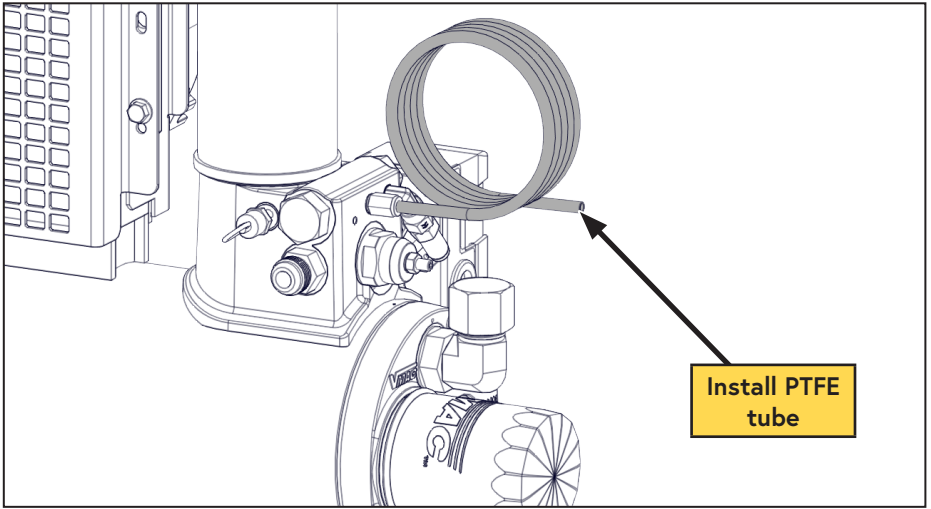


Figure 43 — Tubing Installation

- Route the 1/4 in PTFE tube to the bulkhead fitting, ensuring the tube will not kink, and cut the hose to length.



Ensure the tube is cut square and that there are no sharp edges. Do not use side cutters as this will deform the hose.

- Install the tube into the push-to-connect bulkhead fitting (Figure 44)

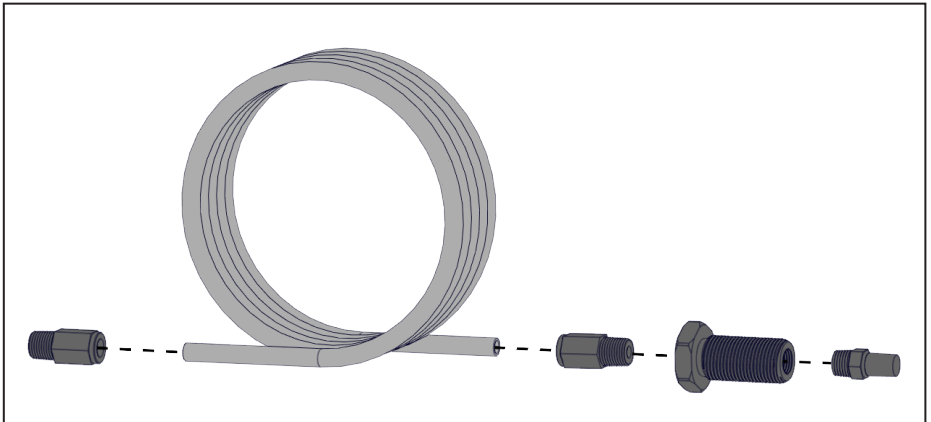


Figure 44 — Tubing Installation Remote Blowdown Muffler assembly

- Secure the tube with the supplied cable ties.

Connecting the Exterior Hoses

- Install the curved end of the 1 in intake hose assembly onto the spigot on the side of the compressor. Direct the hose upwards and secure it using the supplied hose clamp (Figure 45).

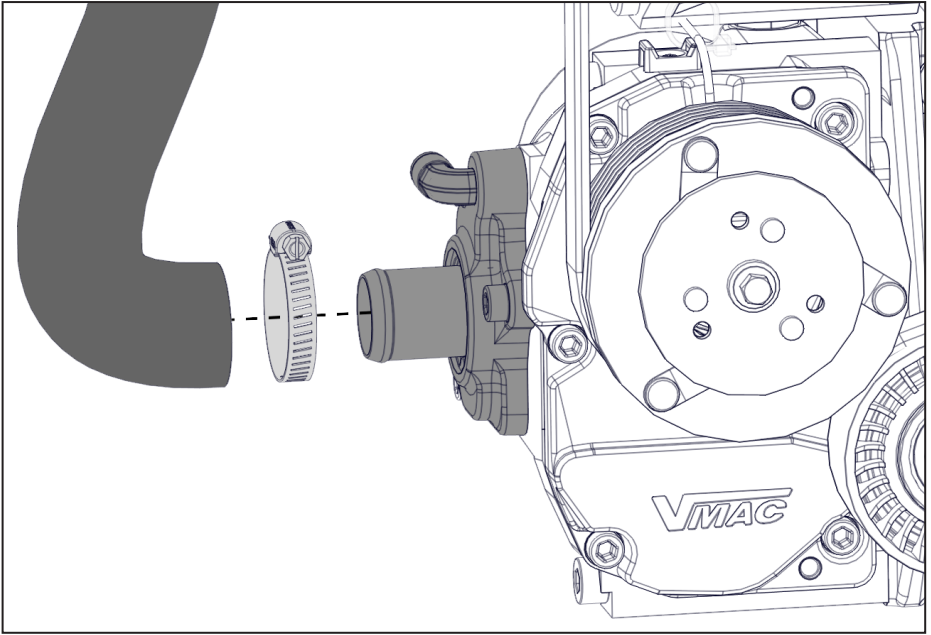


Figure 45 — Install intake hose

- Apply split loom, or equivalent hose protection (not supplied), to the 3/4 in × 120 in and 3/8 in × 120 in hoses.
- Apply the supplied split loom to the 1/4 in × 125 in PTFE tube.
- Connect the 120 in PTFE tube to the 90° push-to-connect fitting on the side of the compressor.
- Connect the 90° end of the 3/4 in hose to the compressor discharge fitting on the rear of the compressor. Direct the hose toward the driver side of the vehicle.

- Route the 3/8 in and 3/4 in hoses, together with the 1/4 in PTFE tube under the engine oil pan and over the front subframe crossmember, towards the driver side of the vehicle (Figure 46).



Figure 46 — Route hoses under the oil pan

- Route the hoses along the inside of the driver side frame rail and secure them using the 2 supplied P-clips and 5/16 in x 3/4 in sheet metal screws in the existing holes on the frame (Figure 47).

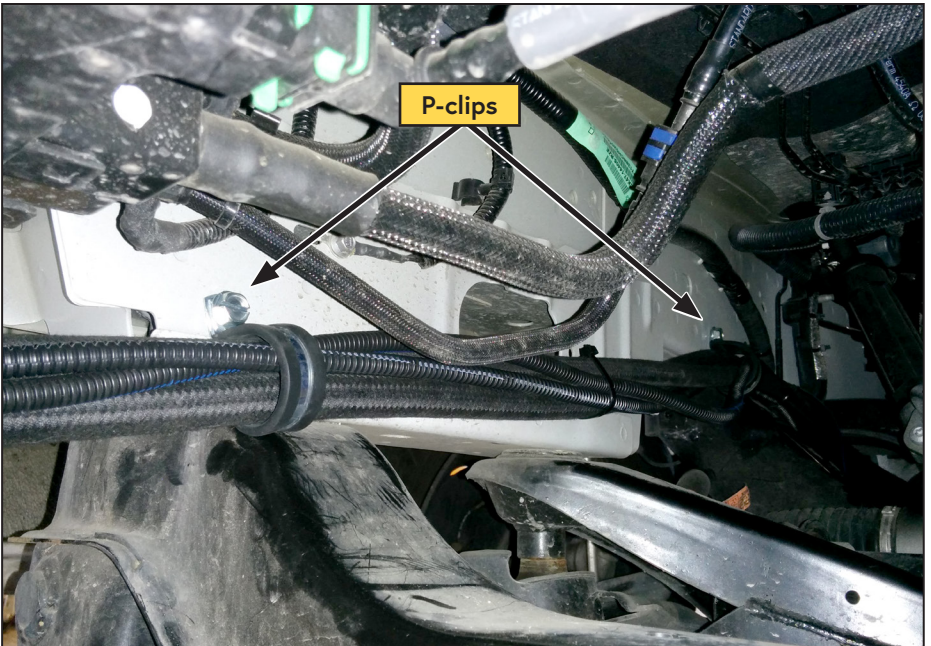


Figure 47 — Hose routing along inside of driver side frame

- Route the hoses above the fuel filler hose and toward the rear of the fuel filler housing (Figure 48, Figure 49).

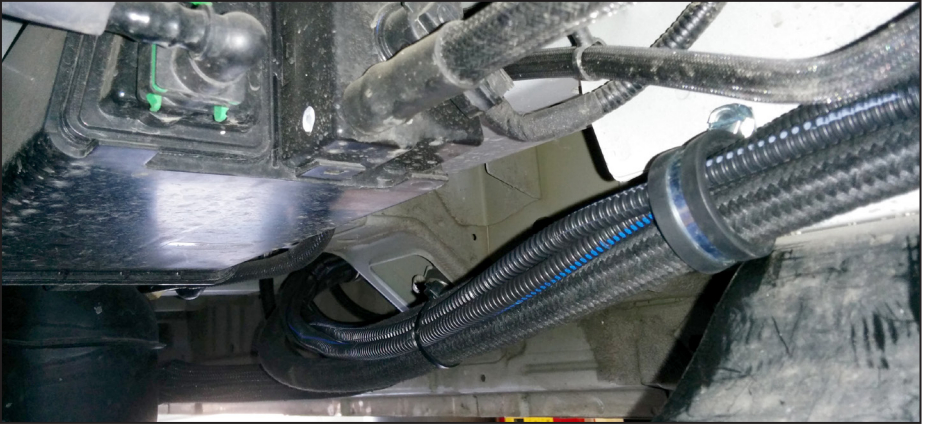


Figure 48 — Hose routing continued

- Secure the hose using the supplied P-clip and 5/16 in x 3/4 in sheet metal screw, in the location shown (Figure 49).

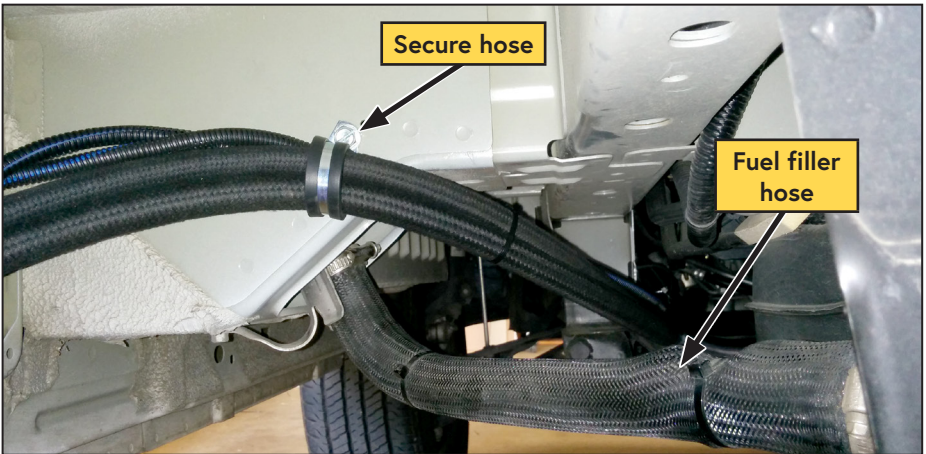


Figure 49 — Hose routing above fuel filler hose

- Attach the 3/4 in x 120 in, 3/8 in x 120 in hoses and the 1/4 in x 125 in PTFE tube to the underside of the bulkhead fittings. Ensure all of the fittings are fully seated, tight and secure.



Ensure there is sufficient slack in the hose routing to allow for normal engine movement.

- Ensure all of the hoses are routed away from any hot, sharp or moving parts, hydraulic lines, and vehicle wiring. Use cable ties, rubber coated P-clips, and suitable hose protection as required. If the vehicle is 4WD, ensure the hoses are protected from the front driveshaft.

Adding Oil to the System



The VMAC supplied and approved compressor oil must be used in this system. Failure to use this special oil will result in damage to the compressor and will void warranty.

Do not overfill the system. Overfilling the system with oil can flood the sight glass window and make the system appear empty.

- Remove the fill cap on the WHASP Tank (above the sight glass) (Figure 50).
- Using a funnel, pour oil into the tank until the oil level in the sight glass reaches the "MAX" line. **The system capacity is 4 L** (Figure 50).
- Reinstall the fill cap and tighten it securely. Ensure the fill port remains accessible as it will be necessary to check and top up the oil after the first compressor start.

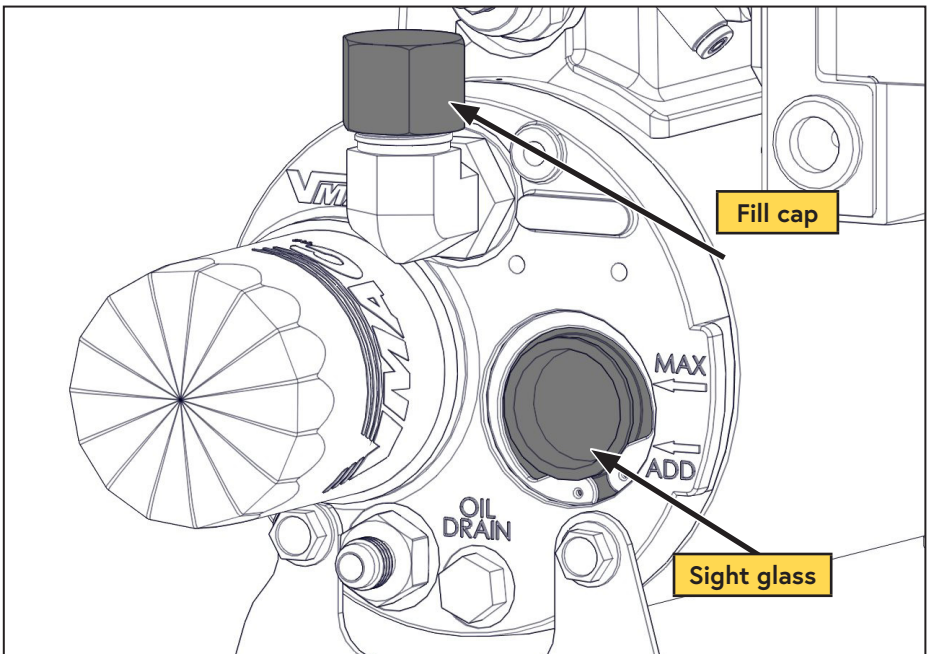


Figure 50 — Filling the WHASP Tank

Installing the Control System

Best Practices

- To confirm a good ground, use an ohm meter to measure the resistance between the ground point and the negative battery terminal. Resistance should be less than $1\ \Omega$.
- Route all wires to ensure they will not contact hot, sharp or moving parts (including the park brake mechanism, steering column, and pedals).
- Before drilling any holes ensure there are no OEM wires, hoses, or components that may be damaged.
- Do not use a test light to probe for power on vehicle circuits, the increased current draw of the test light may damage components.
- Whenever possible, solder all electrical connections and protect the joint with heat shrink.
- Apply loom to all wiring:
 - Use high temperature loom in areas where high temperatures may be expected.
 - Use spiral loom in areas with high vibration.

Splicing into OEM Wiring (Figure 51, Figure 52)

VMAC recommends against cutting OEM wires whenever practical. The preferred method is to remove the pin from the connector using an appropriate tool and slide the shrink tube onto the wire. Strip the wire at the desired location and solder the VMAC wire into place. Slide the shrink tube up to the soldered joint and seal it. Finally, replace the pin in the connector, taking special care to ensure the pin is fully inserted and the locking tabs are engaged.

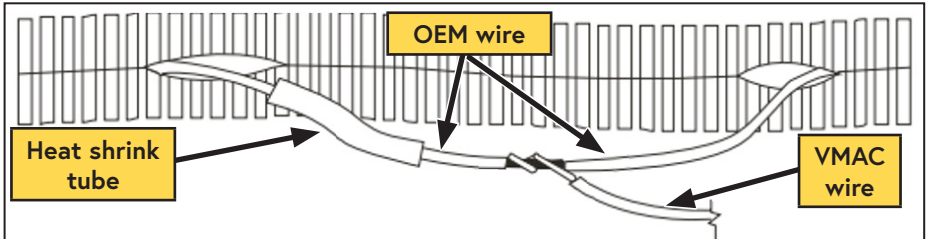


Figure 51 — Solder spliced joint

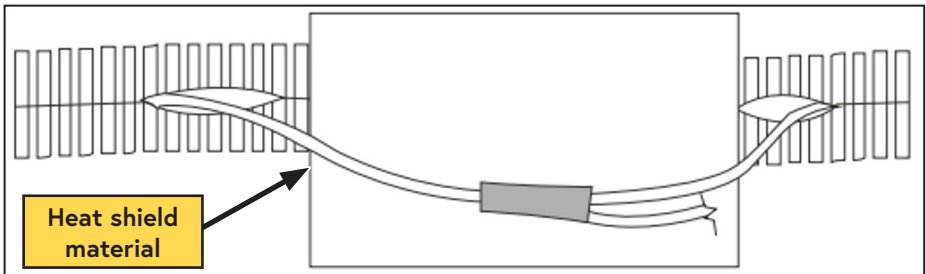


Figure 52 — Seal soldered joint

Electrical Modules

- The Throttle Control, Control Module, and Interface Panel are not weather proof; ensure they are mounted where they will be protected from rain, snow, mud, direct sunlight, etc. (e.g. inside the cab, service body or cabinet).
- Keep the rear of the Interface Panel protected.
- Ensure the Control Module and Throttle Control are mounted away from the pedals, park brake mechanism, or where they could be inadvertently knocked by occupants.

Control Components Overview

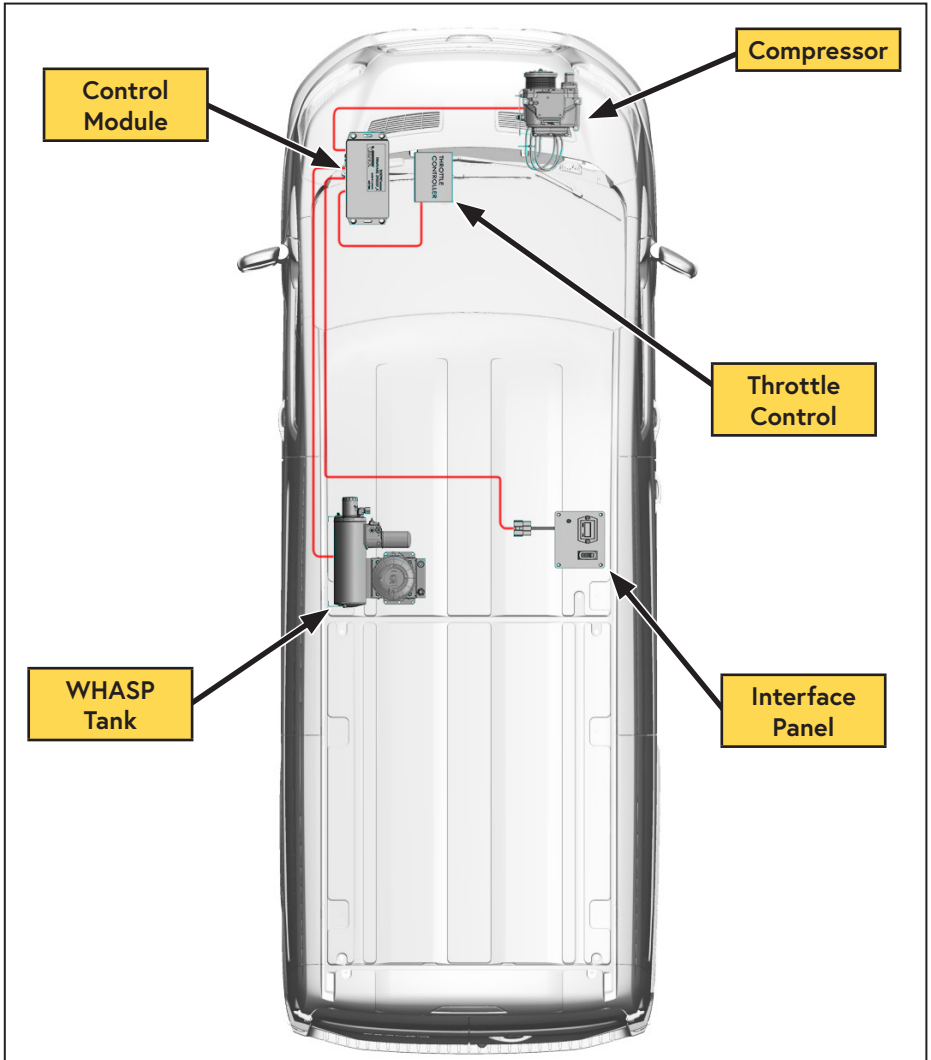


Figure 53 — General component overview
(Actual installation locations may vary)

Control Module (Figure 54)

The Control Module serves as the primary input/output interface between the vehicle and the various VMAC components (compressor, Throttle Control, WHASP Tank, Control Interface, etc.).

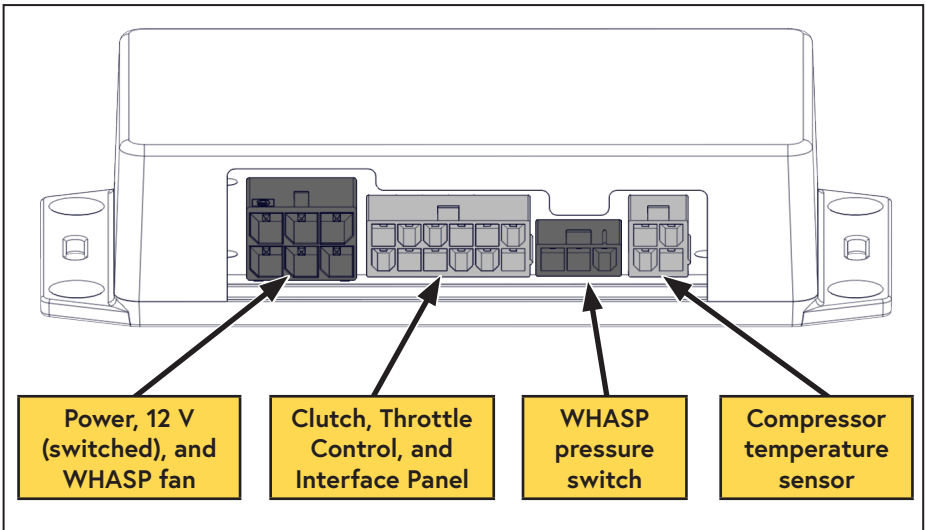


Figure 54 — Control Module

Interface Panel (Figure 55)

The Interface Panel serves as the operator's control panel and contains the "ON/OFF" switch, compressor status light, and the compressor hour meter.

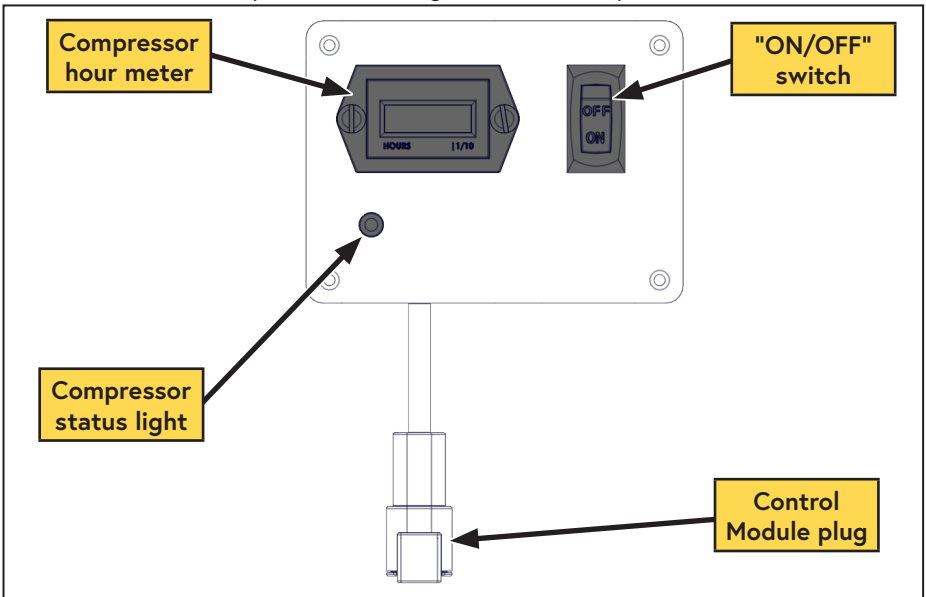


Figure 55 — Interface Panel

Throttle Control (Figure 56)

The Throttle Control responds to signals from the pressure sensor and commands the vehicle's throttle to increase or decrease engine speed in response to air demand.

The Throttle Control also allows the operator to configure the vehicle's engine speed (when air is demanded) to their needs (maximum cfm, specific tool requirements, fuel efficiency, or a combination of these factors).

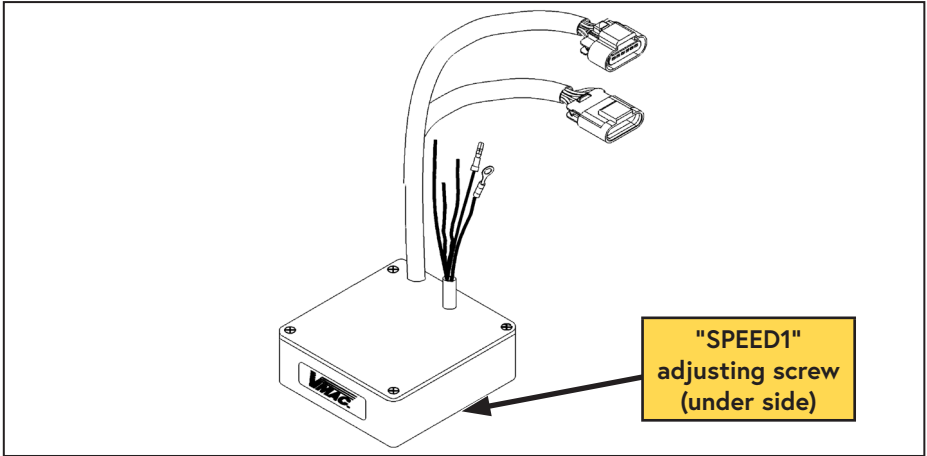


Figure 56 — VMAC Throttle Controls

Mechanical Pressure Switch (Figure 57)

The mechanical pressure switch is mounted on the side of the WHASP Tank and limits the maximum pressure to a safe amount by disengaging the clutch once system pressure is achieved.

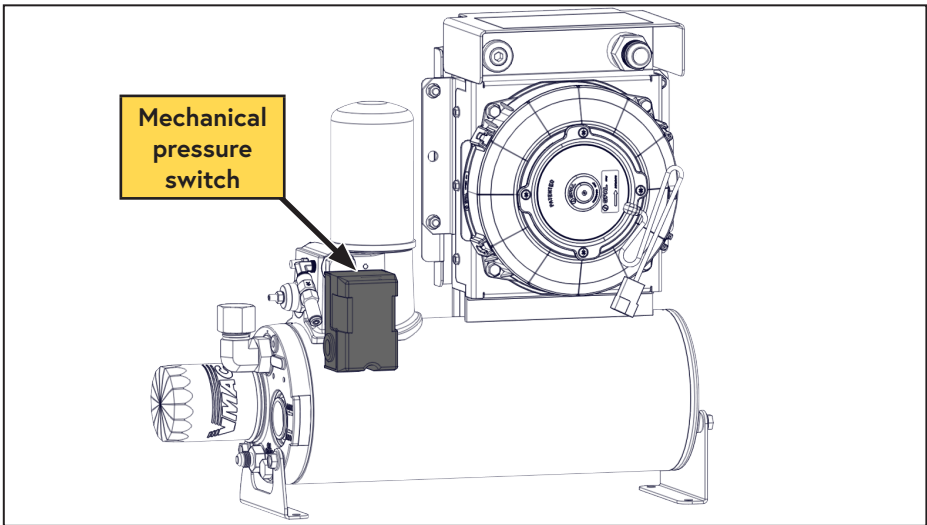


Figure 57 — WHASP Tank pressure switch

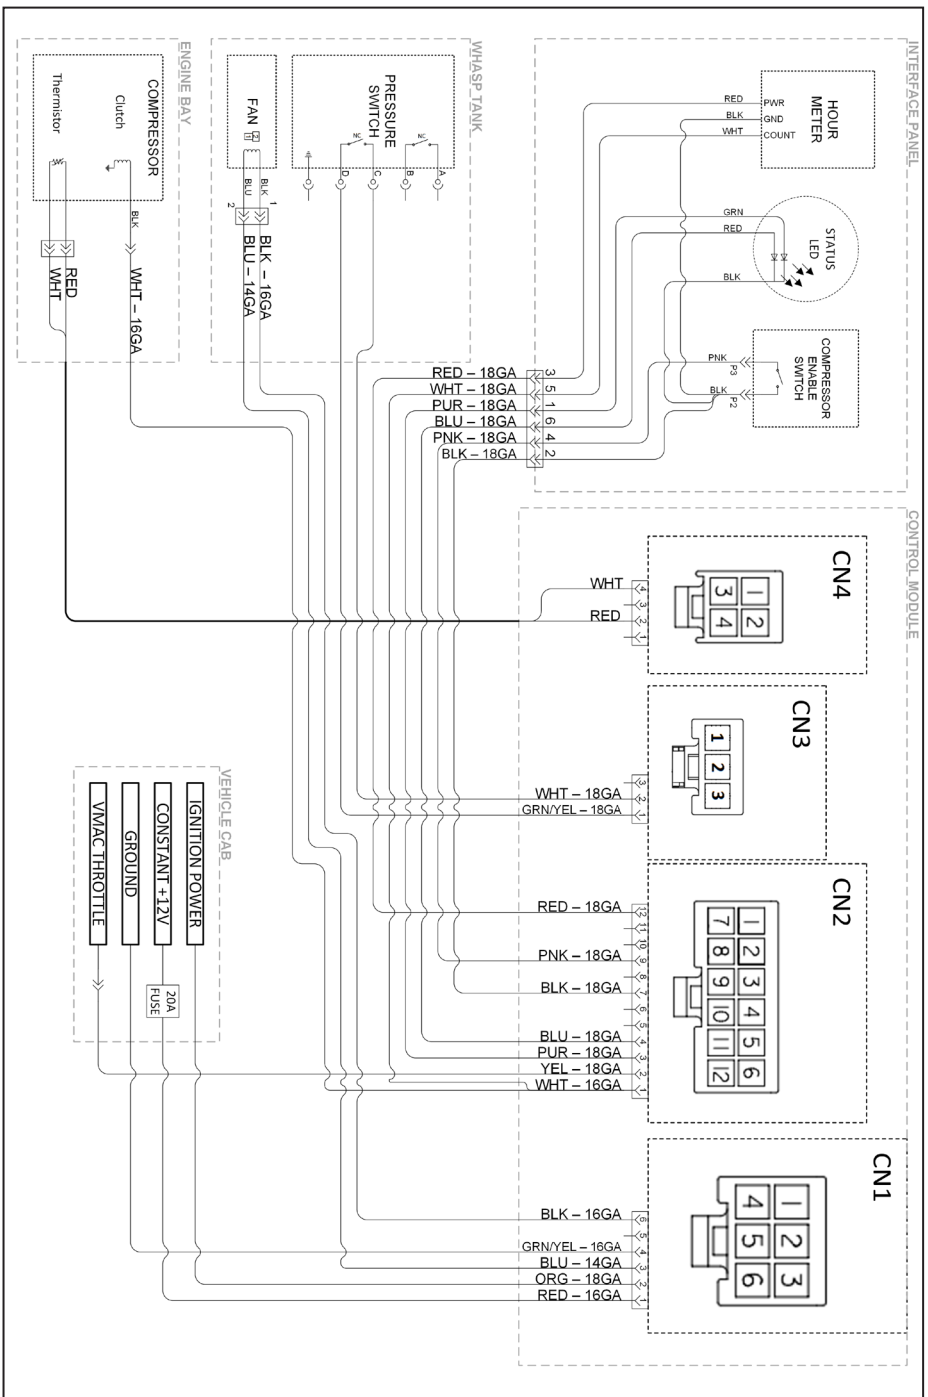


Figure 58 — Electrical schematic

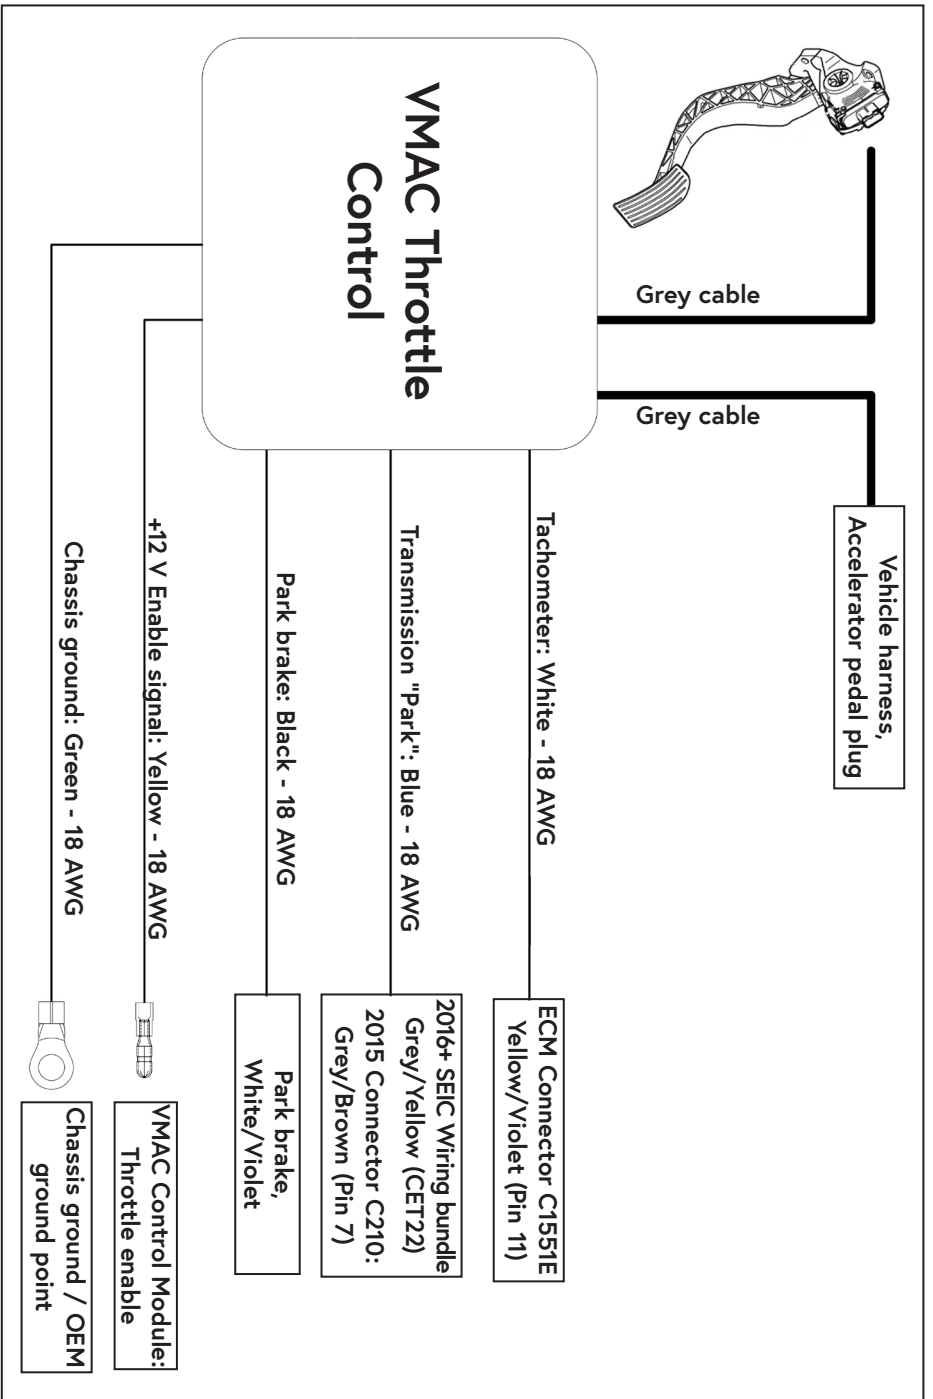


Figure 59 — Wire schematic

Installing the Control Components

Throttle Control and Control Module

- Remove the panel underneath the steering wheel (Figure 60).

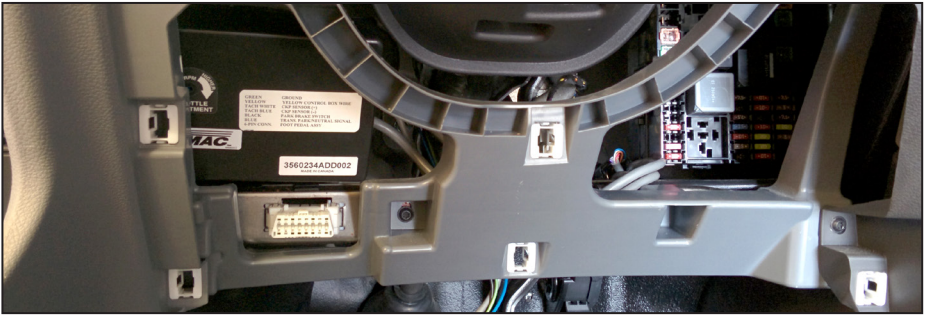


Figure 60 — Mount Throttle Control

- Secure the throttle control with cable ties so that the "SPEED 1" adjusting screw is accessible (Figure 60).
- Unplug the cable from the foot pedal assembly and connect it to the throttle control.
- Plug the 4 harnesses into the Control Module.
- Connect the bullet connector from the yellow wire running from the Control Module to the matching connector on the Throttle Control.
- Mount the Control Module under the dashboard, up and out of the way of the pedals, steering column, and the park brake mechanism.
- Connect the green ground wires from the Throttle Control and Control Module to a chassis ground point.
- Remove the panel under the headlight controls to route the wiring.
- Apply 1/4 in loom (or equivalent protection) to the black wire from the Throttle Control as well as the orange and red wires from the Control Module, and route them underneath the headlight controls towards the driver side door (Figure 61).



Figure 61 — Headlight Switch Panel

- Remove the driver side door weather stripping from the channel, and route the loomed wires between the channel and the driver side floor (Figure 62).

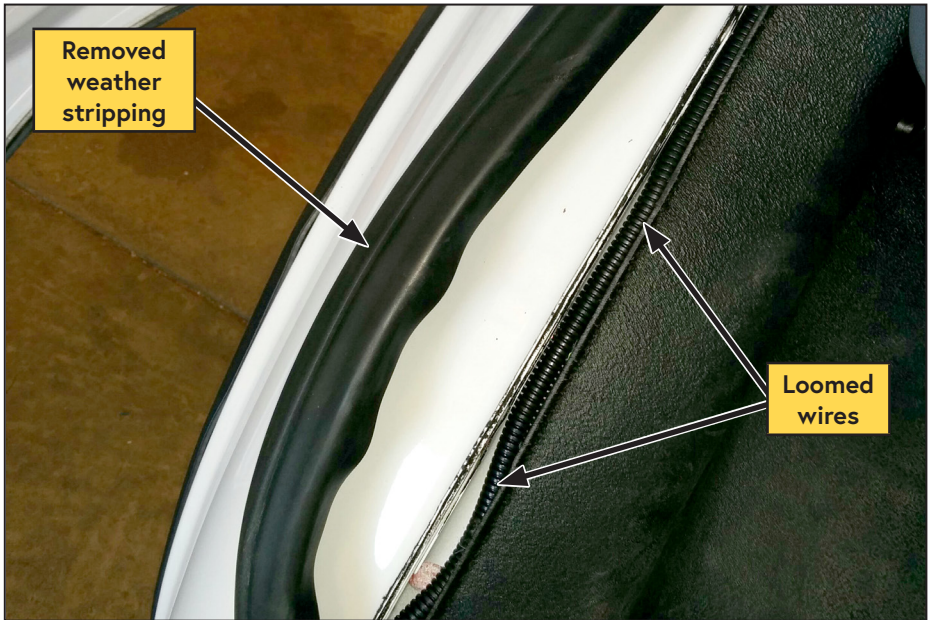


Figure 62 — Route wires

- Route the loomed wires along the inside of the driver door and underneath the driver side step, towards the driver side seat support (Figure 63).



Figure 63 — Driver side step

- Route the loomed wires through the gap in the driver side seat support (Figure 64).

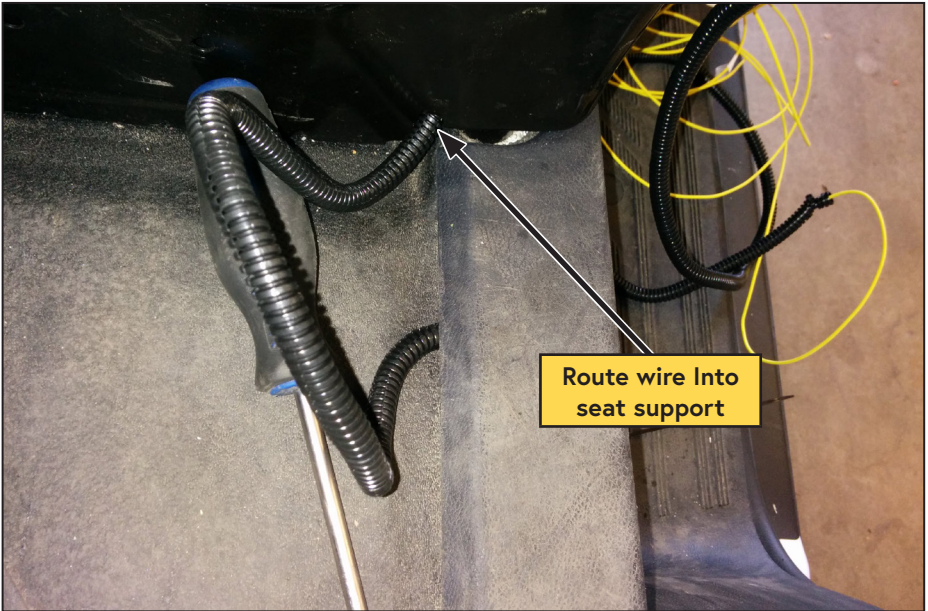


Figure 64 — Driver side seat support

- Crimp the supplied fuse holder to the red wire running from the Control Module. Ensure the fuse holder is installed as close to the power source as possible.
- Connect the other end of the fuse holder to the positive battery terminal. (Figure 65).

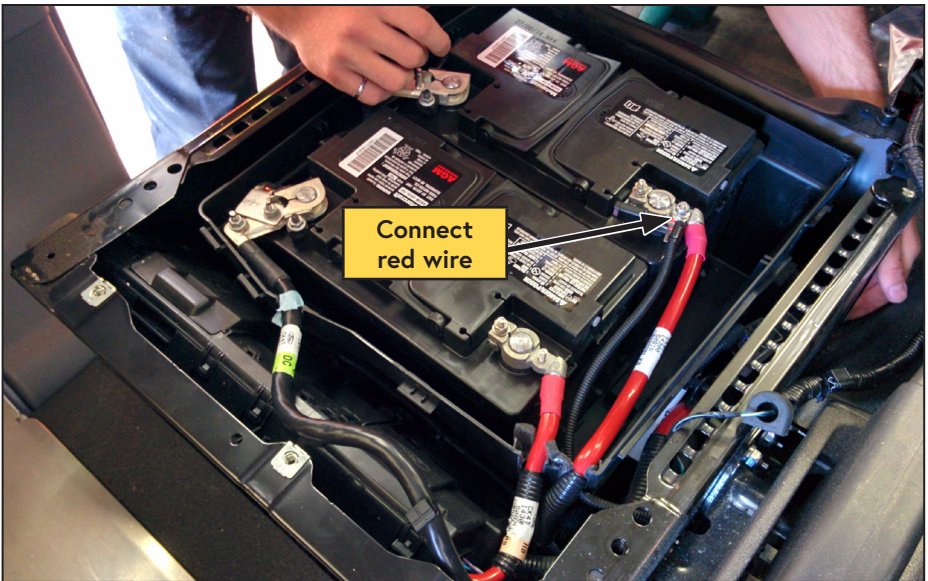


Figure 65 — Connect red wire

2015 – 2017 Model Year

- Crimp the supplied pigtail (orange wire with 6-pin connector) onto the orange wire (switched power) from the Control Module.
- Plug the 6-pin connector into the upfitter key switched terminal beside the batteries.

2018+ Model Year

- Crimp the supplied pigtail (orange wire with 8-pin connector) onto the orange wire (switched power) from the Control Module.
- Plug the 8-pin connector into the upfitter key switched terminal beside the batteries.
- Route the black wire (park brake safety) from the Throttle Control, down between the seat support and battery box, toward the park brake.
- Remove the trim panels from hand brake to access the electrical connections.
- Feed the wire through the park brake wire harness grommet (Figure 66).

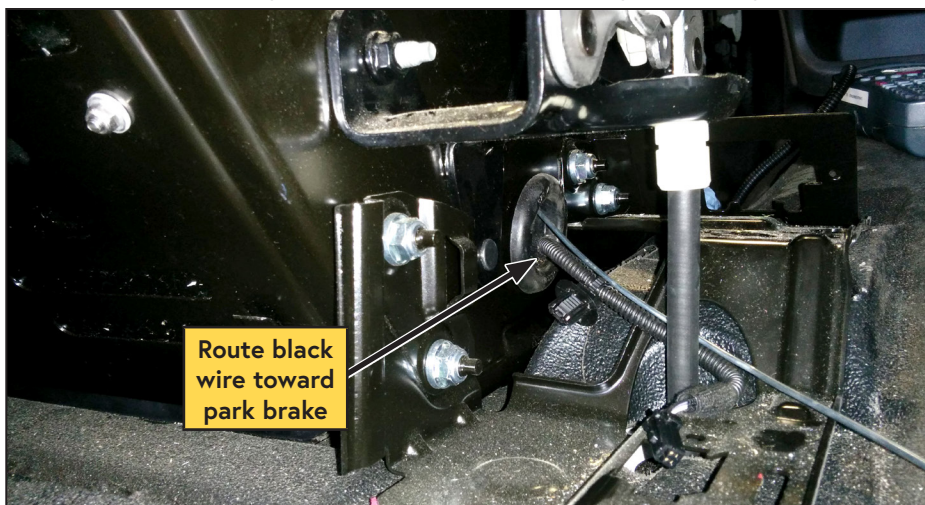


Figure 66 — Route black wire

- Splice the black wire from the throttle control to the white wire with violet stripe running to the park brake.
- Locate a grommet in the firewall and pass the following wires from the Throttle Control and Control Module through to the engine bay*:
 - *White 16 AWG wire with bullet connector from the Control Module (clutch wire).
 - *Grey cable with the green connector from the Control Module (Temperature sensor).
 - *White wire from the Throttle Control (tachometer signal wire).
 - *(2016+ only) Blue wire from the Throttle Control (Park signal wire).



**On 2015 vehicles (or an alternate location for 2016+ vehicles), the blue wire is routed to the C210 connector in the cab near the glove compartment.*

- Remove the 2 bolts securing the coolant overflow bottle, and move it out of the way.
- Remove the driver side headlight.
- Locate the Powertrain Control Module (PCM) behind the driver side headlight (Figure 67).

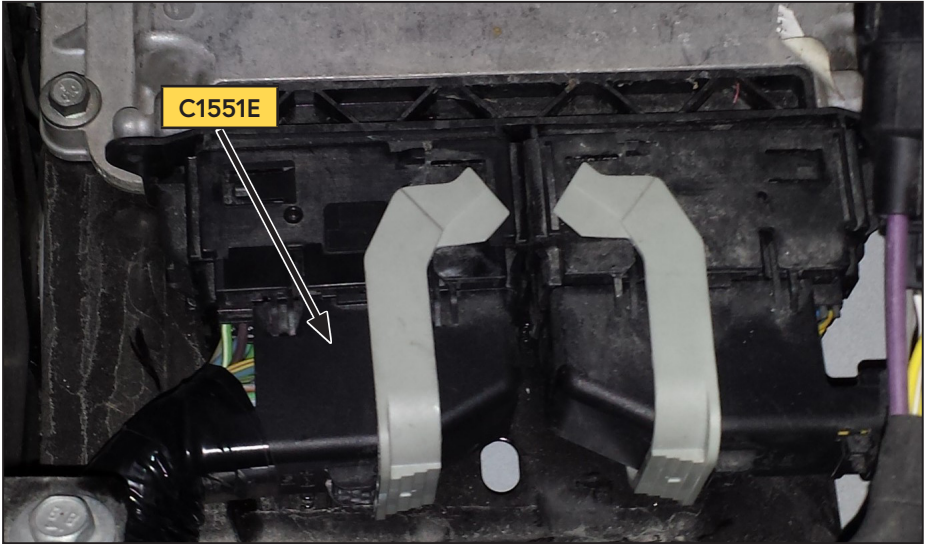


Figure 67 — Powertrain Control Module

- The passenger side plug of the PCM is C1551E; lift the grey tab and pull the connector up to remove it (Figure 67).



Use care when unplugging or plugging in the ECM module plugs to ensure the pins do not become bent or damaged. It is critical that the pins are protected from accidental damage while unplugged from the ECM module.

- Locate the yellow wire with the purple stripe at pin 11 (Figure 68).

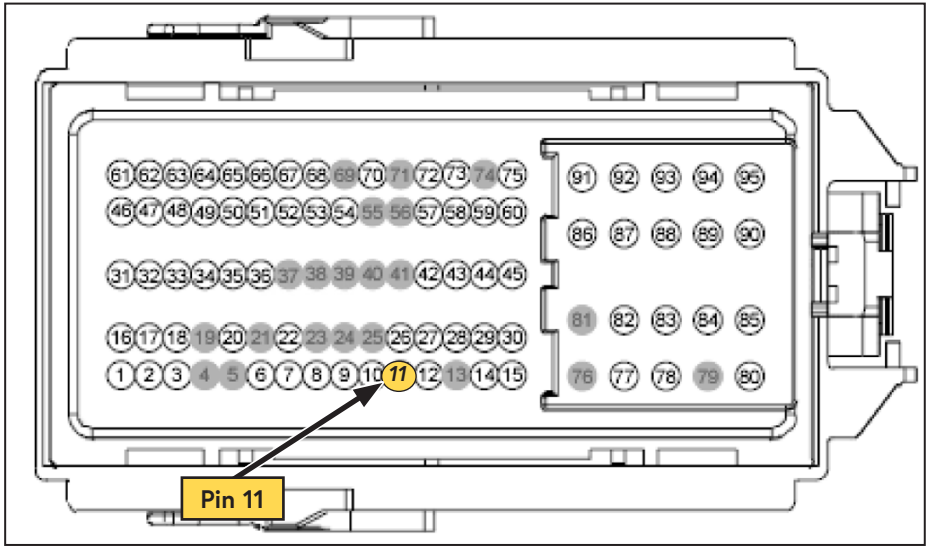


Figure 68 — C1551E electrical connector

- Splice the shorter white wire (without the bullet connector) from the Throttle Control to the yellow wire with the purple stripe at pin 11.
- Use 1/4 in wire loom or equivalent protection to cover the wires, and secure the VMAC tachometer cable to OEM harness with a cable tie (Figure 69).

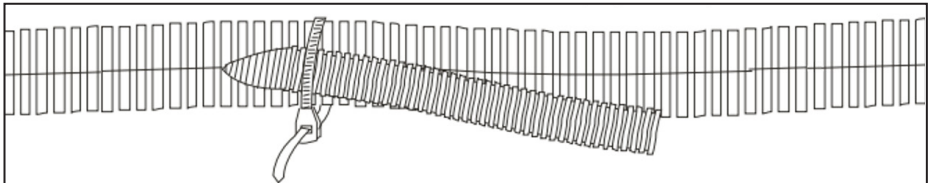


Figure 69 — Loom wire

- Reinstall the PCM and ensure the grey tab is in the locked position.
- Route the white clutch wire and grey temperature sensor cable from the PCM down toward the engine oil filter.
- Bundle the white wire and grey cable together with the compressor hoses routed earlier in the installation.

- Follow the routing path under the engine oil pan and over the front subframe crossmember, towards the passenger side of the vehicle (Figure 70).

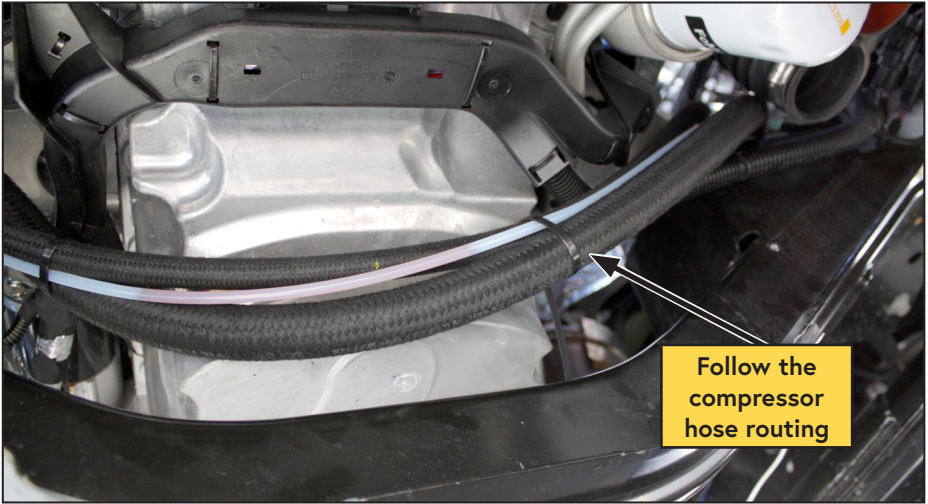


Figure 70 — Route hoses under the oil pan

- Connect the green connector on the grey cable to the matching connector on the compressor.
- Connect the blue bullet connector on the white wire to the matching connector on the compressor.



A spare bullet connector is provided to allow the clutch wire to be shortened.

2016+ Connecting the "Park Signal" wire

- Locate the OEM blunt cut harness located near the PCM behind the driver side headlight (Figure 71).

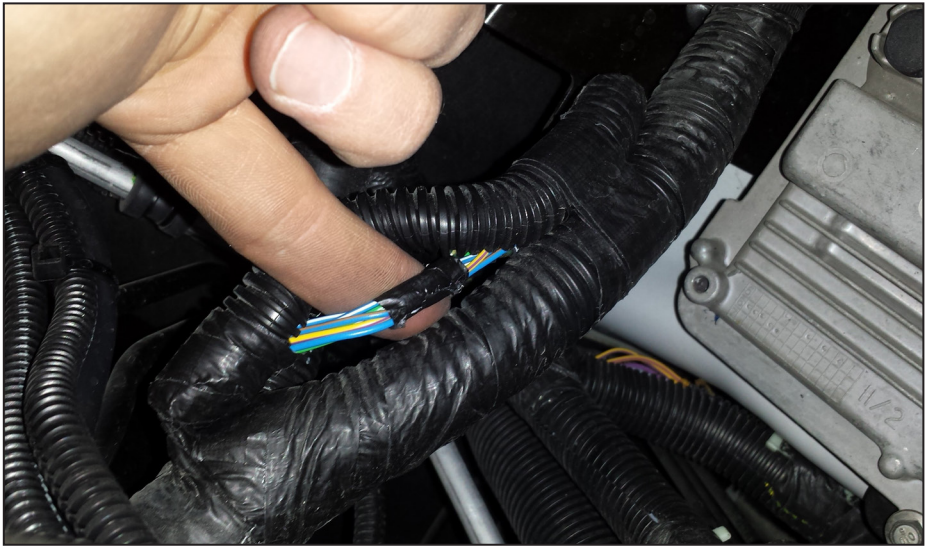


Figure 71 — OEM Blunt cut bundle (2016+ only)

- Splice the long blue wire from the throttle control to the grey wire with yellow stripe (CET22).

2015 vehicles or alternate location for 2016+ vehicles

- Open the glove compartment and depress the 2 tabs at the top rear to allow the compartment to hang down and out of the way (Figure 72).

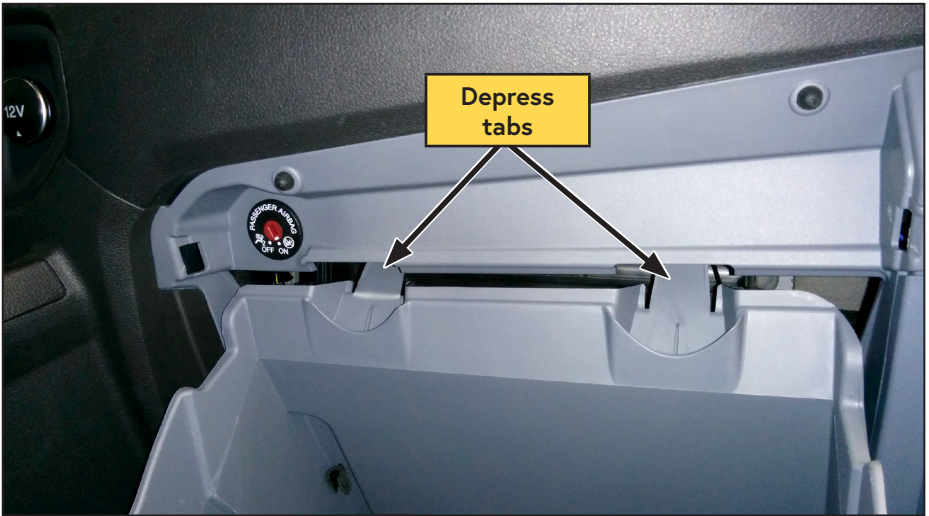


Figure 72 — Drop glove box

- Route the long blue wire from the Throttle Control above the driver side fuse box, along the factory wire harness located at the rear of the dashboard, to the passenger side of the dashboard. The wire will appear on the passenger side of the dashboard, above the HVAC system (Figure 73).

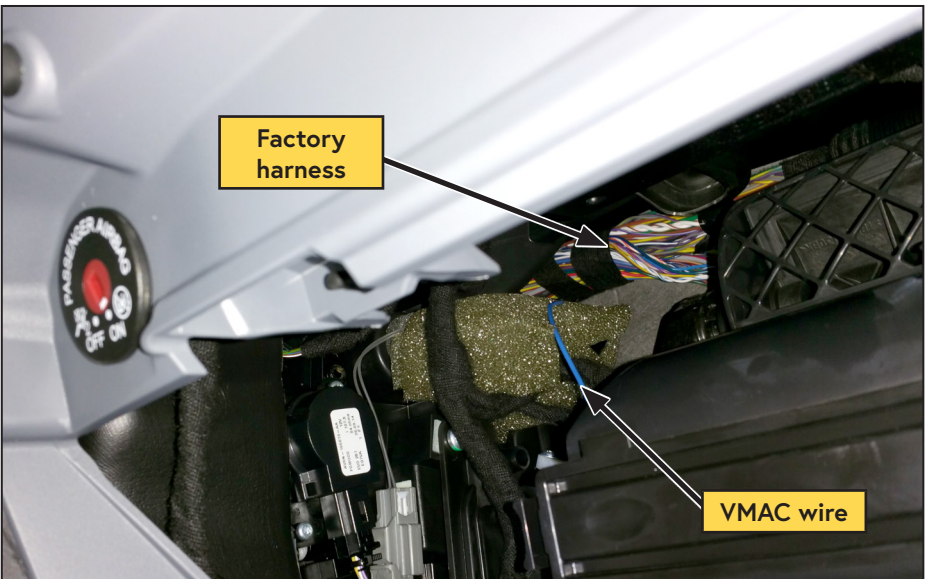


Figure 73 — Passenger dashboard

- Remove the access panel at the back of cup holder directly to the right of the glove compartment; connector C210 is located behind this panel (Figure 74).



Figure 74 — Connector C210

- Use an 8 mm socket to remove both the left and right fasteners holding the C210 connector (Figure 75).

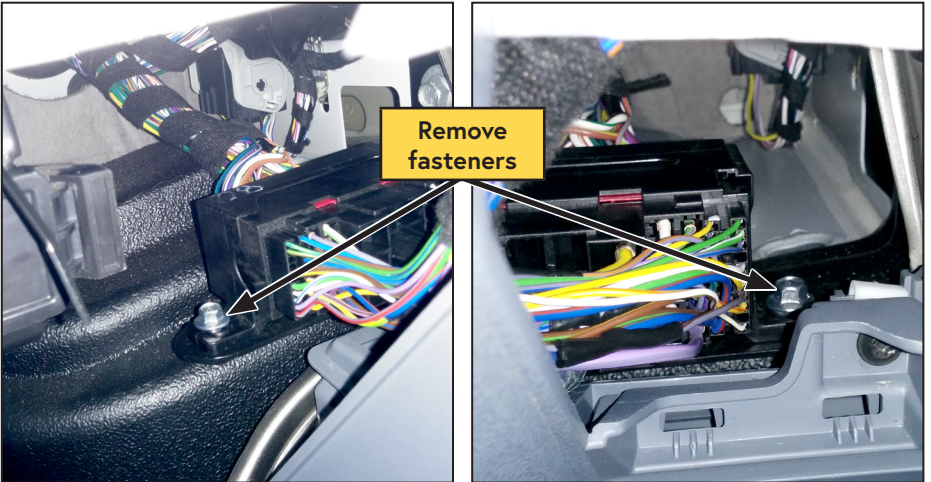


Figure 75 — Remove C210 connector

- Gently pull the connector toward the driver side and remove the 10 mm bolt to separate the connector (Figure 76).

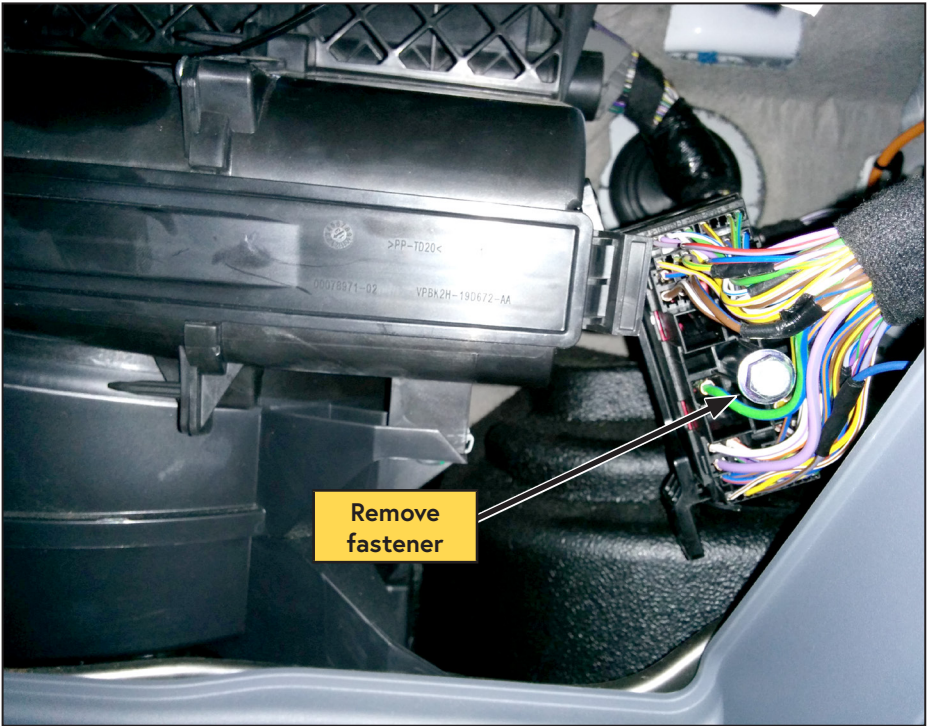


Figure 76 — Connector C210

- Locate pin 7 of the C210 connector; it will be populated by a grey wire with a brown stripe (Figure 77, Figure 78)

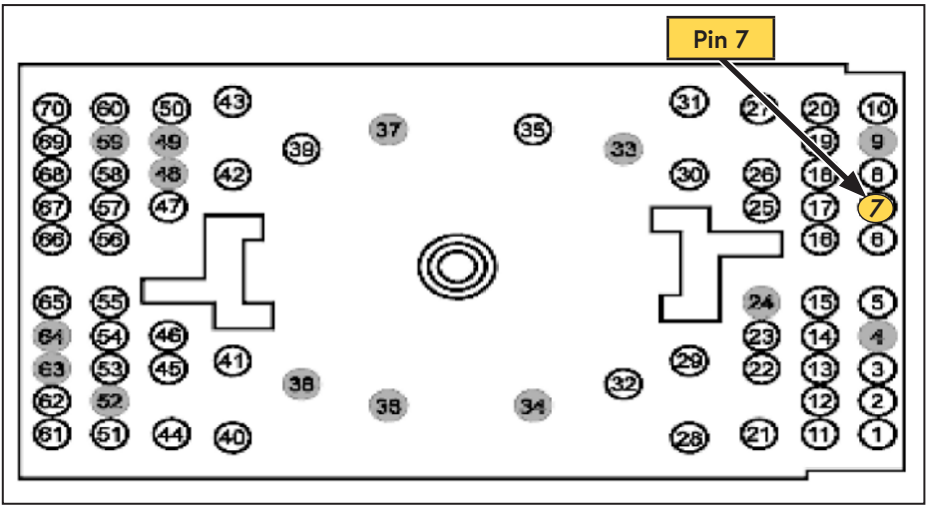


Figure 77 — Male Harness C210

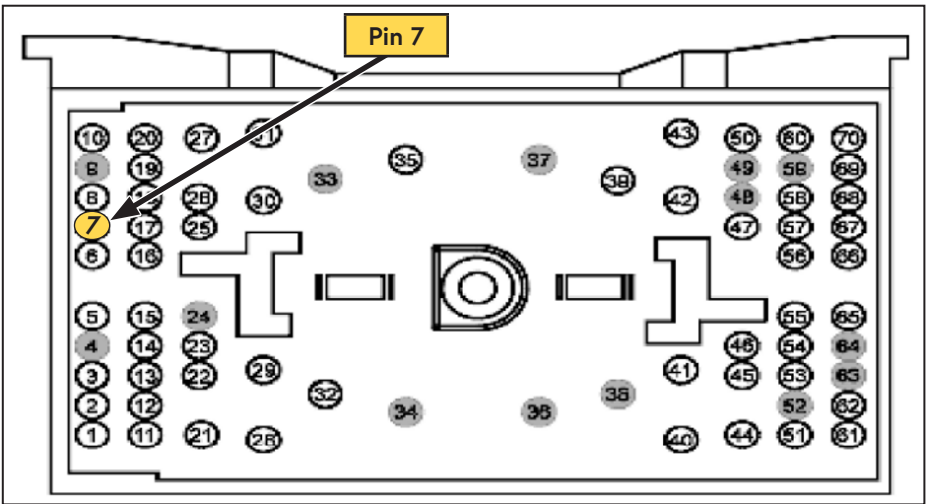


Figure 78 — Female Harness C210

- Splice the long blue wire from the Throttle Control to the grey wire with the brown stripe at pin 7.
- Reinstall the C210 connector.
- Reinstall the glove compartment.

Interface Panel

- Install the Interface Panel in a suitable location (Figure 79).

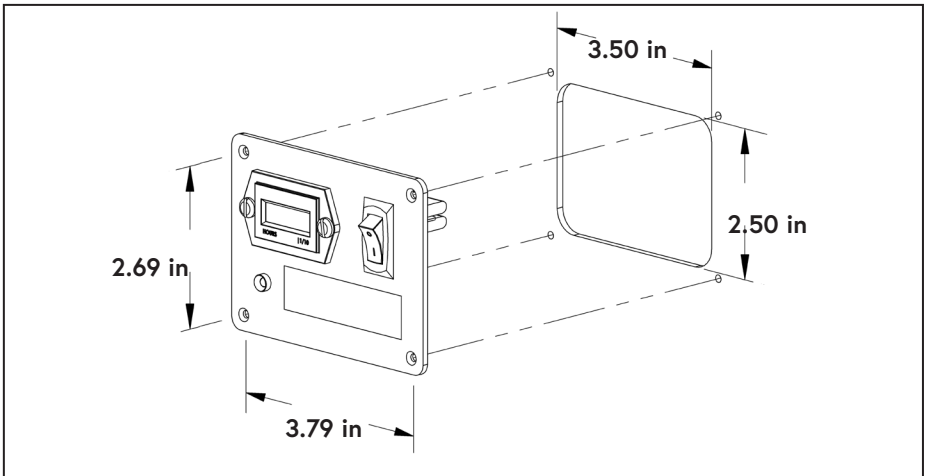


Figure 79 — Interface Panel mounting dimensions

- Connect the harness from the control module to the interface panel.
- Connect the fan connector from the control module to the plug on the WHASP Tank.
- Remove the cover from the WHASP Tank pressure switch and connect the 2 ring terminals from the control module to the pressure switch on the WHASP Tank (not polarity dependent) (Figure 80).

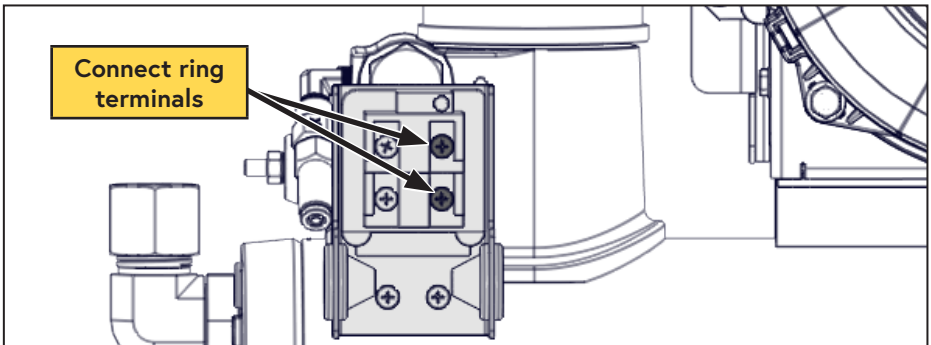



Figure 80 — Connect pressure switch

- Replace the cover when finished.

 ***The WHASP Tank harnesses are made to a generic length. Any excess harness should be coiled up and secured out of the way. There are (x2) extra ring terminals included with the pressure switch harness; if desired, cut the harness to length and crimp the spare ring connectors to it.***

- Ensure all wires and harnesses are protected with loom and routed away from sharp, hot, or moving components and away from high traffic areas.

Installing the Air Filter and Power Steering Reservoir

- Mount the VMAC air filter assembly to the supplied bracket using the supplied M6 nylon lock nuts (Figure 81).

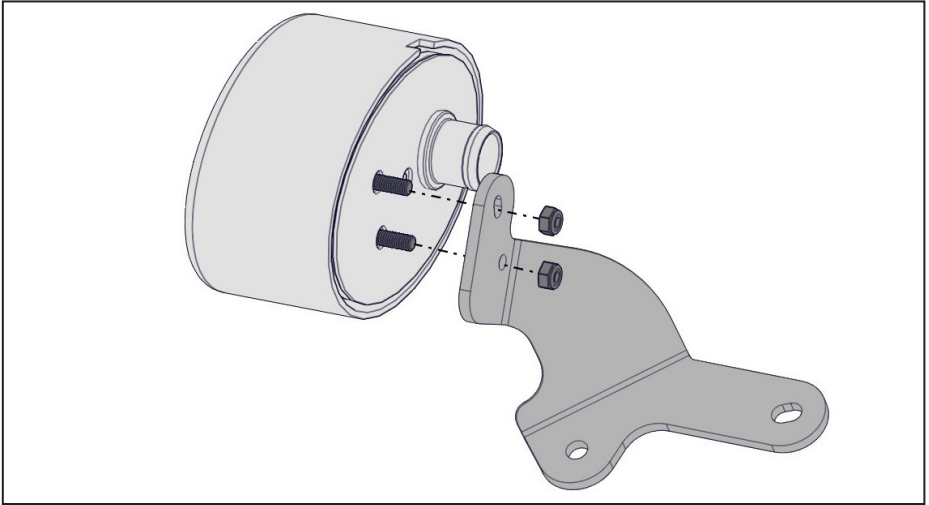


Figure 81 — Air filter and bracket

- Using the 2 × M8 bolts retained from the OEM lifting eye, mount the VMAC air filter and bracket assembly in the OEM engine lifting eye location (Figure 82).



Figure 82 — Air filter

- Connect the compressor intake tube to the spigot on the air filter assembly and secure it with a hose clamp.

- Attach the power steering reservoir bracket to the OEM reservoir bracket using the supplied M6 bolt and nut and align the remaining holes (Figure 83).



Figure 83 — Power steering reservoir bracket

- Install the power steering fluid reservoir using the Torx screws through the remaining holes in the supplied bracket (Figure 83).

- Route the power steering feed hose along the best path from the reservoir to the pump. The hose can be rotated to ensure it will not contact the compressor clutch, the A/C clutch or any other hot, sharp or moving components (Figure 84).

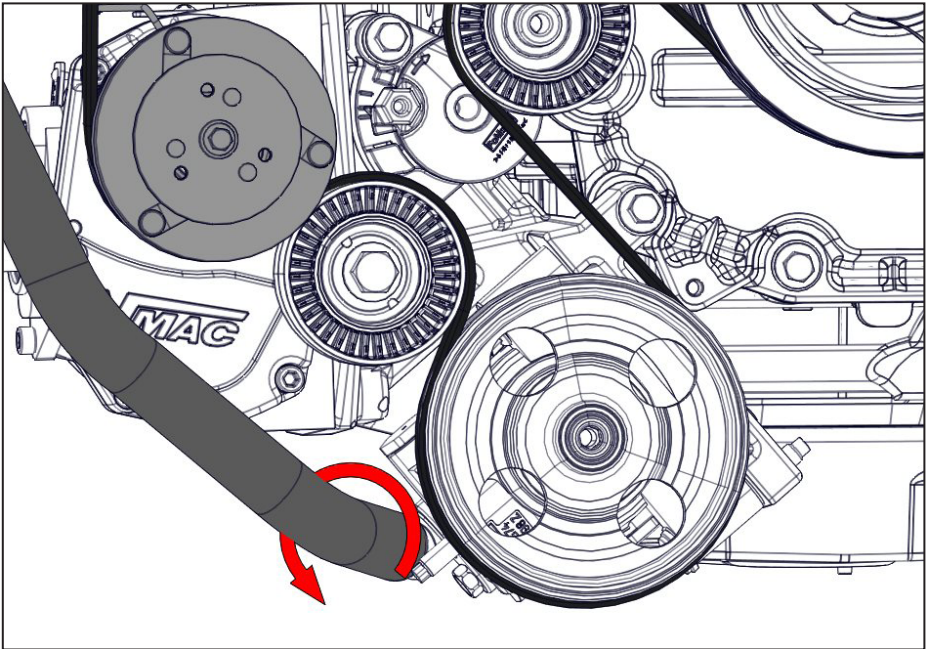



Figure 84 — Rotate power steering hose

	<p><i>Rotate the power steering feed hose on the pump inlet to direct the hose away from the belt line and any moving components.</i></p>
--	---

Air Receiver Tank



Pressure in the air receiver tank will not be relieved when the compressor system blows down. This is normal operation. Prior to performing any service work on the system, discharge any stored air in the air receiver tank.



The VMAC WHASP Tank has a built-in check valve. Use of an additional check valve is not required and may cause erratic performance.

The VMAC compressor system will automatically depressurize when it is shutdown. The WHASP Tank has a built in check valve which prevents blow back and moisture from the receiver tank entering the WHASP Tank. Installation of an additional check valve will cause erratic performance.

While the air receiver tank can be installed at any height in relation to the WHASP, the discharge hose running from the WHASP must be installed as high as possible on the air receiver tank to prevent problems with condensation that may have accumulated in the receiver tank (Figure 85).

Drain the condensed water from the receiver tank daily.

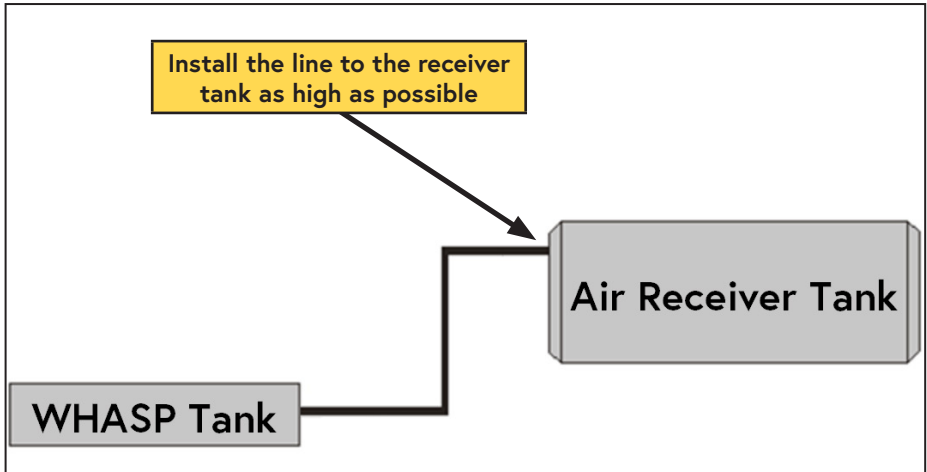


Figure 85 — Air receiver tank

Recommended Accessories

While the compressor system will function without the following accessories, VMAC strongly recommends their use for optimal performance.

See the "Accessory Product" section of this manual on page 70 for a list of products available for purchase through VMAC.

Larger Air Receiver Tank

A larger capacity air receiver tank provides a larger buffer as it gives the compressor time to react by increasing the engine speed and producing air before the tool stalls. It also has the advantage of lowering the duty cycle of the compressor system.

(This application requires a minimum air receiver tank size of 6 USG).

Pressure Gauge

While not critical to system performance, a pressure gauge is important for fine tuning the system and simplifies any potential troubleshooting.

Install a 200 psi pressure gauge downstream of the air discharge valve.

Pressure Regulator and/or Lubricator or FRL

The compressor can produce air pressures up to approximately 150 psi (1035 kPa). It is the responsibility of the user to know the pressure and air flow requirements of the tools powered by the air compressor system.

An appropriate air pressure regulator and lubricator can be installed downstream of the air discharge valve. Failure to regulate the air pressure may cause damage to the tool.

Completing the Installation

- Check all VMAC and OEM wiring to ensure it will not contact any hot, sharp or moving components and will not interfere with the operation of the vehicle. Secure all wiring with rubber coated P-clips, cable ties and loom as required.
- Check all VMAC and OEM hoses and tubes to ensure they will not contact any hot, sharp or moving components and will not interfere with the operation of the vehicle. Secure all hoses and tubes with rubber coated P-clips, cable ties and loom as required.
- Reinstall the driver side headlight (if previously removed).
- Reinstall the coolant overflow bottle.
- Reinstall the 2 vacuum tubes to the engine air filter intake tube, ensure the red and green clips are fastened securely (Figure 86).

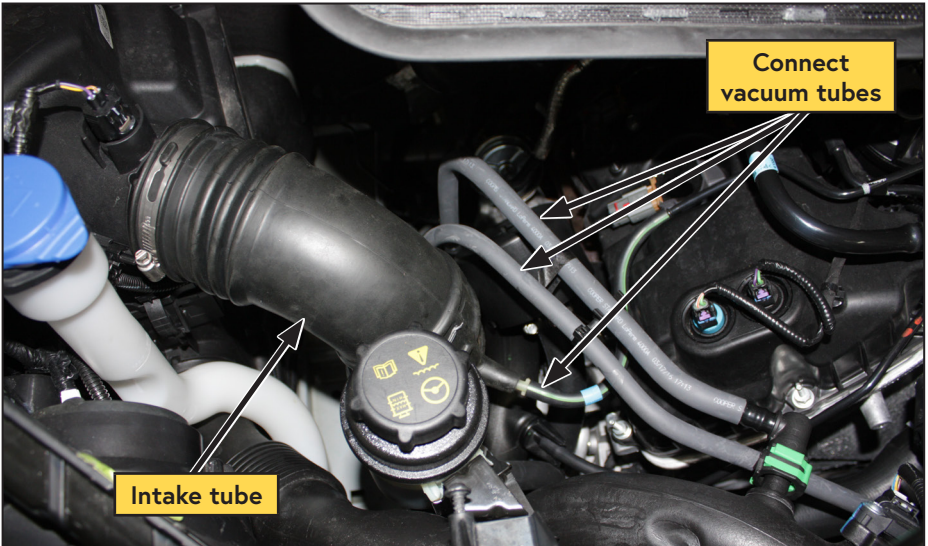


Figure 86 — Install intake tube

- Reinstall the intake elbow onto the air filter box and the intake tube and tighten the hose clamps.
- Reattach the vacuum tube to the intake elbow (Figure 86).
- Reinstall the driver seat.
- Reinstall the seat electrical connector.
- Replace all dashboard panels and kick plates that were removed.
- Reconnect the battery(s) and install the cover.

Testing the Installation



Lift the vehicle, ensuring the driven wheels are off of the ground. Support the vehicle securely with appropriately rated jack stands. Ensure there are no people around the vehicle before beginning the test.

If the vehicle fails the test, ensure the wiring to all of the connections are correct and secure. If additional assistance is required, contact your local VMAC dealer or call VMAC Technical Support 1-888-241-2289 or 250-740-3200.

Safety Test

Ensure the following has been completed:

- Place the transmission in "PARK" and apply the park brake. Turn the ignition key to "ON" but do not start the engine.
- Turn on the compressor and listen for the compressor clutch to engage.
- Observe the hour meter, and ensure the hourglass icon is blinking.
- Turn off the compressor switch and ensure the clutch has disengaged.

Before Starting the Engine Checklist

Ensure the following has been completed:

- Check that the compressor oil level at the tank sight glass is correct.
- Complete a final inspection of the installation to ensure everything has been completed.
- Perform a final belt alignment check.
- Check all wiring for security and protection. Ensure nothing is touching the compressor body.
- Ensure all of the compressor outlets are closed.
- Ensure the parking brake is engaged and the transmission is in "PARK".
- Start the engine.

After Starting the Engine Checklist

- Allow the vehicle to reach operating temperature.
- Turn on the compressor. The compressor clutch should engage, and the engine speed should increase in response to the throttle control. The vehicle's tachometer should indicate approximately 2,000 rpm.
- Allow the compressor to run for approximately 10 seconds.
- Turn off the compressor.
- Shut down the engine.
- Check the compressor oil level after the engine has been shut down and the oil level has had time to stabilize.



Ensure any stored air is drained from the system prior to adding oil.

- Add oil as necessary to bring the level to the "FULL" line in the sight glass and check for leaks.
- Start the engine. Assistance may be required for the next steps.



The following tests confirm that the drive disable system is working correctly. The drive disable system prevents the VMAC throttle from increasing engine rpm unless the transmission is in "PARK" and the park brake is engaged.

2 people are required to perform this safety test. 1 person must remain in the driver seat and be prepared to actuate the service (foot) brake if necessary.

The second person will actuate the compressor switch and ball valve as necessary

- Install the VMAC Air Test Tool (P/N: A700052) with the 40 cfm (5/32 in) orifice installed and the ball valve closed.
- With the engine running and the vehicle in "PARK", release the parking brake.
- Turn on the compressor and open the ball valve. The clutch should engage, but engine speed should NOT increase.
- Close the ball valve.
- Turn off the compressor.
- Reapply the park brake.



The steps marked with asterisks will be repeated.

- *With the engine running, Depress the service (foot) brake and shift the transmission out of "PARK".
- *Turn on the compressor and open the ball valve. The clutch should engage, but engine speed should NOT increase.
- *Close the ball valve.
- *Turn off the compressor.
- *Drain any accumulated air from the system.
- *Shift the transmission into "PARK".
- Repeat the steps marked with asterisks for all transmission selector positions, returning the gear selector to "PARK" after each gear is tested.



Engine speed should not increase unless the vehicle is in "PARK" or "NEUTRAL".

- Drain any air that may have accumulated during the previous tests.
- Ensure the parking brake is engaged.
- Turn on the compressor and open the ball valve.
- Release the park brake. The engine speed should drop to base idle.
- Reapply the park brake. The engine speed should increase as soon as the park brake is engaged.
- Close the ball valve, allow the system to build to full pressure and the engine speed to return to base idle.
- Turn the compressor off and shut down the engine.
- Drain any accumulated air from the system.

Final Testing

Ensure the following has been completed:

- Operate the system with an air tool (or the VMAC Air Test Tool with the appropriate orifice installed) for at least 1/2 hour (1 hour preferred).



The WHASP Tank cooling fan is thermostatically controlled, and may start or stop without warning.

- Road test the vehicle for approximately 20 km (14 miles).
- Observe the compressor while it is operating to ensure the belts rotate properly, pulleys rotate smoothly and nothing is rubbing or contacting hot parts.
- Check all components, connections and fasteners once the engine is turned off and the system has cooled.
- Check the coolant level after the engine has been operated.
- Check the compressor oil level after the engine has been shut down and the oil level has had time to stabilize.



The VMAC Throttle Control is not tuned for maximum cfm output! For instructions on throttle adjustment and compressor performance testing, see the instructions starting on the next page.

Performance Testing and System Adjustments

Adjusting the Throttle Control

Adjustment is made by turning the "SPEED 1" adjustment screw. Turn the screw counter-clockwise to decrease engine speed, or clockwise to increase engine speed.

The Throttle Control is designed to provide 40 cfm when the throttle adjustment is at its maximum, this also prevents overspeeding the compressor.

Engine speed adjustments may be made so that the amount of air delivered by the system matches the requirements of the tools or equipment that will be used.

- This system achieves 40 cfm at 2,800 rpm.
- If the system is unable to "keep up" with a specific tool, the engine speed is too low. Try increasing the engine speed gradually, until the desired performance is obtained.
- If the system is cycling on and off rapidly when using a particular tool, the engine speed is likely higher than necessary for that tool. Try turning the engine speed down and observe the performance.



When testing the system or adjusting the VMAC Throttle Control, ensure the system does not exceed 3,000 engine rpm. Exceeding this speed will cause erratic system performance and in extreme cases may also cause long term damage to the compressor.

If the system is overspeeding, verify all wiring connections and retest. If the system continues to overspeed, contact VMAC Technical Support at 888-241-2289.

Compressor Performance Testing

This system has been adjusted at the factory for general operation, not maximum cfm. Any performance testing should be done with the Throttle Control set for maximum cfm. See the previous page for instruction on adjusting the Throttle Control.

System operation can be tested using the tools that will be operated by the system or by using the VMAC Test Tool (A700052) with the 40 cfm (5/32 in) orifice in the outlet to simulate tool use (Figure 87).

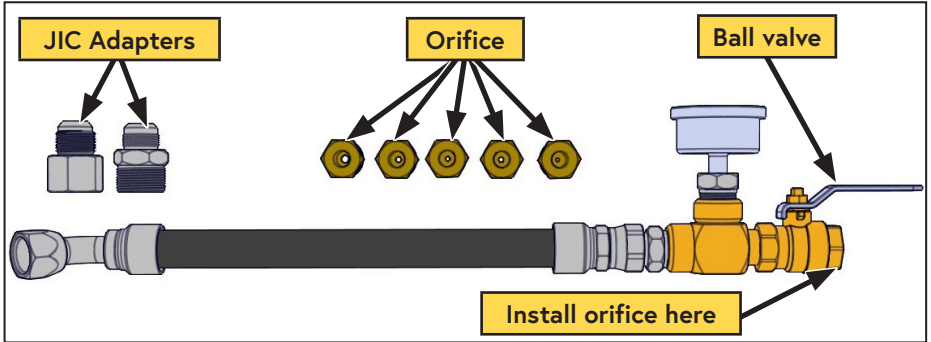


Figure 87 — A700052 VMAC Air Test Tool



Disconnect all downstream equipment (hose reels, etc.) and connect the test tool directly to the discharge fitting on the WHASP Tank.

Ensure there are no leaks in the test tool. The system may not idle down if there are leaks in the lines or fittings.

- Install the VMAC test tool at the system outlet with the 40 cfm (5/32 in) orifice.
- Ensure the ball valve is closed.
- Place the transmission in "PARK" and fully apply the park brake.
- Allow the engine to run until it is at operating temperature.
- Turn on the air compressor system and allow it to operate until the oil is warm.
- Observe the pressure gauge. Pressure should be approximately 150 psi.
- Open the ball valve on the test tool and observe the engine tachometer. Engine speed should increase to approximately 2,800 rpm. The pressure on the gauge should be 90 - 120 psi.
- Close the air valve slowly to allow the system pressure to rise. When the pressure reaches the pressure switch set-point of 150 psi, the system will disengage the compressor clutch and reduce the engine speed to base idle.
- Once the system pressure is at maximum, slowly open the ball valve on the test tool until the pressure on the gauge begins to drop. Engine speed should ramp up to approximately 2,800 rpm when the pressure drops approximately 40 psi below the pressure switch set-point.

Accessory Products from VMAC

Compressor Service Kits



200 Hour or 6 Month Service Kit -

Part number: A700263


Includes 4 L VMAC high performance compressor oil, oil filter, air filter, and next service due decal.

400 Hour or 1-Year Service Kit -

Part number: A700264

Includes 4 L VMAC high performance compressor oil, oil filter, air filter, spin-on oil separator, safety valve, muffler, and next service due decal.

Bulkhead Fittings




Part number: 3801095

Bulkhead fittings are used for passing the system discharge, oil, and scavenge hoses through the floor or body panels.

Includes:

- 3/4 in JIC bulkhead fitting P/N: 4900170.
- 3/8 in JIC bulkhead fitting P/N: 4900209.
- 1/8 in NPT bulkhead fitting P/N: 5000178.
- 2 x 45° 1/4 push-to-connect fittings P/N: 5000158.

Hose Fittings



45° 1/4 push-to-connect fitting P/N: 5000158.

1/4 in push-to-connect fitting For PTFE scavenge tube.

90° 1/4 push-to-connect fitting P/N: 5000020.

1/4 in push-to-connect fitting For PTFE scavenge tube.

Straight 1/4 in push-to-connect fitting P/N: 5000012.

1/4 in push-to-connect fitting For PTFE scavenge tube.

90° 3/8 in hose fitting P/N: 4900117.

3/8 in hose fitting for Oil Return Hose.

90° 3/4 in hose fitting P/N: 4900043.

3/8 in hose fitting for Compressor Discharge Hose.


1/2 in x 50 ft Hose Reel



Part number: A700007

Spring-loaded 1/2 in x 50 ft hose reel; steel construction; full flow shaft and swivel for maximum performance.

6 Gallon, 160 psi Air Receiver Wing Tank



Part number: A300045

Air receiver tanks are used for lowering compressor duty cycle and removing water from compressed air; recommended for optimum operation of all VMAC Gas Driven, Diesel Driven, Hydraulic, and UNDERHOOD40 air compressors. Manufactured to FMVSS 121 standard; includes fittings, 160 psi pressure relief valve, and tank drain.

- Max pressure: up to 150 psi.
- Dimensions: 32 in (81.3 cm) L x 8 in (20.3 cm) D.
- Weight: 23 lb (10.4 kg).

10 Gallon, 200 psi Air Receiver Tank w/ Mounting Feet




Part number: A300047

Air receiver tanks are used for lowering compressor duty cycle and removing water from compressed air. Recommended for optimum operation of VMAC Hydraulic Air Compressors, VMAC Diesel Driven Air Compressors, UNDERHOOD40, UNDERHOOD70 – Green Series Air Compressors, and VMAC Multifunction Power Systems, which include standby mode; ASME certified; includes fittings, 200 psi pressure relief valve, tank drain, and 200 psi pressure gauge.

- Max pressure: up to 200 psi.
- Dimensions: 30 in (76.2 cm) L x 10 in (25.4 cm) D.
- Weight: 33 lb (15 kg).

35 Gallon, 200 psi Air Receiver Wing Tank

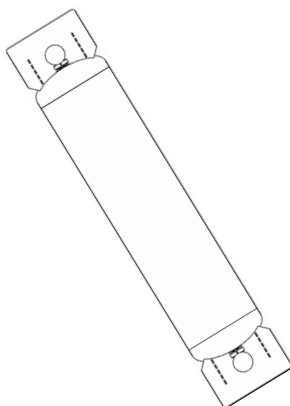


Part number: A300010

Air receiver tanks are used for lowering compressor duty cycle and removing water from compressed air. Recommended for optimum operation of VMAC Diesel Air Compressors, Hydraulic Air Compressors, UNDERHOOD40, UNDERHOOD70 – Green Series Air Compressors, and VMAC Multifunction Power Systems, which include standby mode; ASME certified; includes fittings, 200 psi pressure relief valve, tank drain, and 200 psi pressure gauge.

- Max pressure: up to 200 psi.
- Dimensions: 73 3/4 in (187.3 cm) L x 14 in (35.6 cm) D.
- Weight: 95 lb (43.1 kg).

Air Aftercooler




Part number: A800070

Improves tool performance and extends the life of air tools; removes up to 80% of water from compressed air; includes automatic water drain.

- Max air flow: 70 cfm / 175 psi.
- Port size: 3/4 in NPT inlet and outlet.
- Electrical: 12 V.
- Dimensions: 17 in (43.2 cm) L x 8.0 in (20.3 cm) W x 14.5 in (36.8 cm) H .
- Weight: 35 lb (15.8 kg).

Filter Regulator Lubricator (FRL) – 70 cfm




Part number: A700151

Extends the life of air tools; filter removes contaminants from the compressed air, adjustable regulator can reduce air pressure going to tools, lubricator adds atomized tool oil to the air stream to lubricate air tools (Tool oil not included).

- Max air flow: up to 70 cfm / 150 psi.
- Port size: 3/4 in NPT inlet and outlet.


Remote Muffler



Part number: A700224

The A700224 WHASP remote mount muffler kit is designed to relocate the blowdown muffler to an external location. This is recommended for applications where the WHASP Tank will be located inside of a van or service body, the remote mounted muffler will reduce cabin noise when the compressor blowdown operates, and will ensure any oil vapor will be safely discharged outside of the vehicle.

Interface Harness Extension



Part number: A700265

This interface harness extension provides an additional 10 ft of cable which allows for greater flexibility in locating the Interface Panel.

Warranty Registration

This form must be fully completed and returned to VMAC at the time the vehicle is put into service. Warranty may be void if this form is not received by VMAC within 3 months of receiving the vehicle, or 200 hours of operation, whichever occurs first.



VMAC's Warranty policy and registration can be viewed online at:

www.vmacair.com/warranty

Product Information

System Identification Number: **V** _____

Compressor Serial Number: **P** _____

Owner / End User Information

Company Name: _____

City: _____ State / Province: _____

Phone: (____) ____-_____

Email Address: _____

Date vehicle was put into service: ____/____/____
Day Month Year

Installer Information

Installer Company Name: _____

City: _____ State / Province: _____

Submitted by

Name: _____ Phone: (____) ____-_____

Email: _____

Vehicle Information (Optional)

Unit: _____ Year: _____

Make: _____ Model: _____

Vehicle Identification Number: _____

Manufactured by



888-241-2289



877-740-3202



www.vmacair.com



tech@vmacair.com



warranty@vmacair.com



www.kb.vmacair.com



1333 Kipp Road, Nanaimo, B.C., V9X 1R3 Canada