


CUSTOM ROTARY SCREW COMPRESSOR SOLUTIONS FOR YOUR APPLICATION



BENEFITS

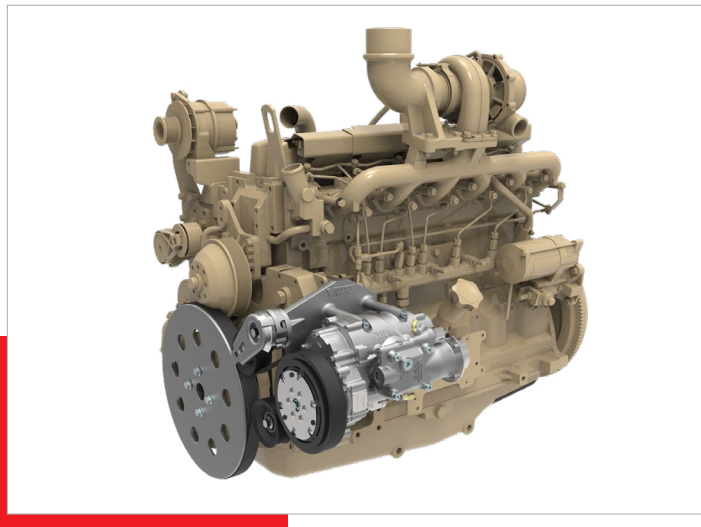

Compact Size

Built to fit in tight spaces. 44% smaller than competitive products.
770 in³ (12 L) vs. competitor's 1,371 in³ (23 L)



100% Duty Cycle

30 - 130 CFM. 100% of the time.



Lightweight, Aluminum Design

63% weight savings compared to competitive products.
56.7 lb (26 kg) with clutch vs. competitor's 154.3 lb (70 kg) without clutch.







Customizable Applications

Choose the VMAC components to fit your unique system.



Engineered & Manufactured With Precision In Canada

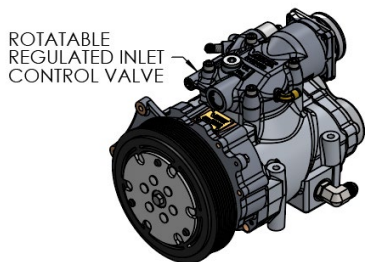


TECHNICAL SPECIFICATIONS

Minimum Working Pressure	90 psi	6.2 bar
Maximum Working Pressure	175 psi	10.3 bar
Maximum CFM*	130 CFM	3,681 l/min
Compressor Weight	56.7 lb	25.7 kg
Maximum Clutch Speed	4,200 RPM	

*Using ASME PTC 19.5 - 2004 flow measurement standard at 100 psi

FLOW RATE

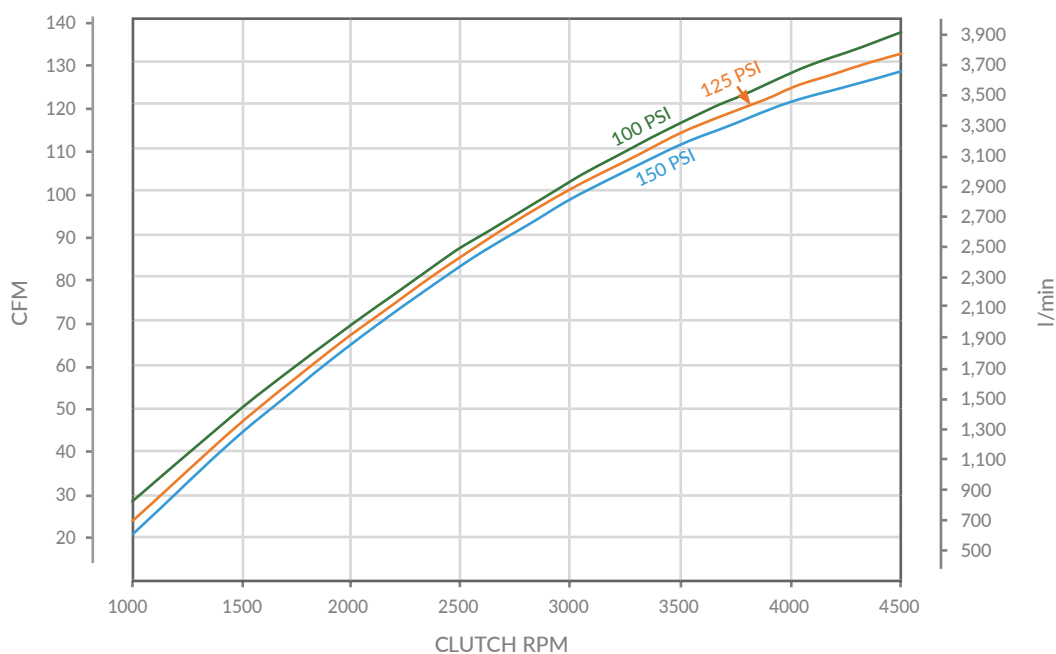

POWER/TORQUE - RPM

