

CUSTOM ROTARY SCREW COMPRESSOR SOLUTIONS FOR YOUR APPLICATION



BENEFITS



Compact Size

Built to fit in tight spaces. 60% smaller than competitive products.
136 in³ (2.2 L) vs. competitor's 337 in³ (5.5 L)



100% Duty Cycle

15 - 40 CFM. 100% of the time.



Lightweight, Aluminum Design

57% weight savings compared to competitive products.
14.1 lb (6.4 kg) with clutch vs. competitor's 33 lb (15 kg) without clutch.







Customizable Applications

Choose the VMAC components to fit your unique system.



Engineered & Manufactured With Precision in Canada

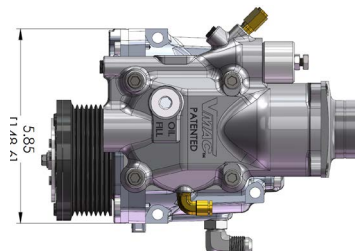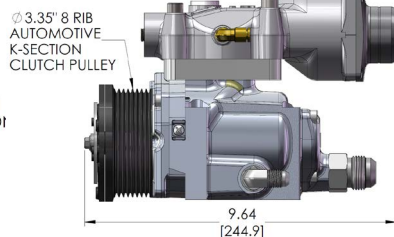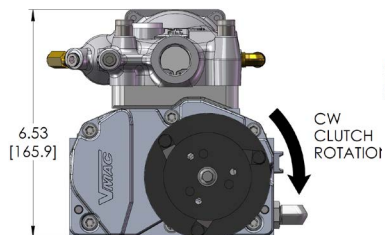


TECHNICAL SPECIFICATIONS

Minimum Working Pressure	90 psi	6.2 bar
Maximum Working Pressure	175 psi	12.1 bar
Maximum CFM*	40 CFM	1,133 l/min
Compressor Weight	14.1 lb	6.4 kg
Maximum Clutch Speed	6,500 RPM	

*Using ASME PTC 19.5 - 2004 flow measurement standard at 100 psi

FLOW RATE

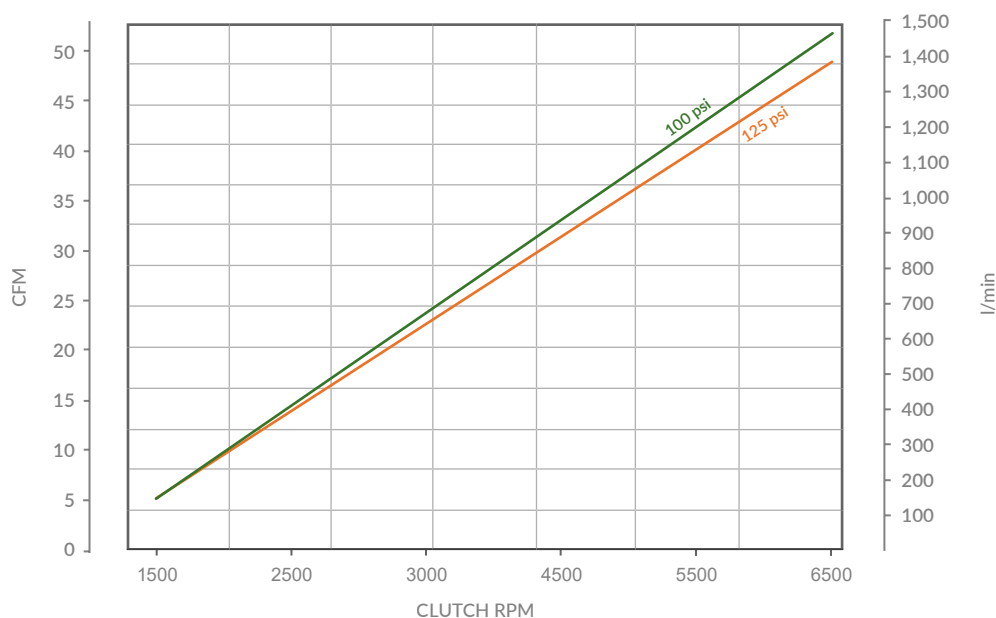

POWER/TORQUE - RPM

